


Structure

PORCELAIN STONE

- Taking its cue from the minimalist movement, this contemporary collection is inspired by concrete and stone
- 5 basic colors make a perfect backdrop for bold statements in design
- Available in 24" x 24", 12" x 24", 6" x 24", and 6" x 6" sizes
- Offered in larger format, rectified tile, Structure may be used in modular patterns or planked as part of the Get Planked® program
- Made in the USA and feature a minimum of 20% recycled content
- Bull nose and cove base trim are offered.



AV221 Gypsum



AV222 Sandstone



AV223 Shale



24" x 24"

12" x 24"

6" x 24"

6" x 6"



24" x 24"

12" x 24"

6" x 24"

6" x 6"



24" x 24"

12" x 24"

6" x 24"

6" x 6"



AV224 Timber



AV225 Basalt



24" x 24"

12" x 24"

6" x 24"

6" x 6"




24" x 24"

12" x 24"

6" x 24"

6" x 6"

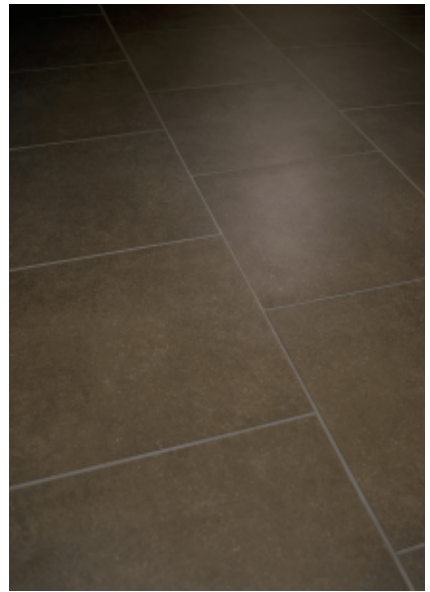

Product featured in photo: AV224 Timber 24" x 24"

Structure

PORCELAIN STONE

Sizes Available

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
24 x 24	597 x 597	10.5	UPS
12 x 24	297 x 597	10.5	UPS
6 x 24	147 x 597	10.5	UPS
6 x 6	147 x 147	10.5	UPS

All field tile is rectified and modular with a 3mm grout joint.

Coordinating Trim (available in all colors)

4 x 24 Single Bullnose	97 x 597	10.5	UPS
6 x 12 Cove Base	150 x 297	10	UPS



4" x 24" Bullnose



6" x 12" Cove Base

Shade & Texture Index

Structure™ has a shade variation of V2.



V1



V2



V3



V4

V1=Uniform Appearance
V2=Slight Variation
V3=Moderate Variation
V4=Substantial Variation

Recommended Usage

Structure is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Structure is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 18 inches or longer, Crossville® recommends an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.

Care and Maintenance

Regular cleaning is the best way to keep Structure tile looking good for years to come. Use clean, hot water (combined with a house hold cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc.com.

Product Performance

Breaking Strength	>500 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	MOHs Scale
Coefficient of Friction		
Dry	>0.8	ASTM C1028
Wet	>0.7	ASTM C1028

Certified Recycling Processes

Structure contains a minimum of 20 percent pre-consumer recycled content and is manufactured by Crossville® using processes that have been certified by Scientific Certification Systems. SCS has verified that through these recycling processes Crossville recycles nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling, Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back™ Program. For more information, visit CrossvilleInc.com/green.



Product featured in photo: AV223 Shale 6" x 24", 12" x 24"



Product featured in photo above: AV224 Timber 24" x 24"