



PORCELAIN STONE® | NATURAL STONE | GLASS TILE | WALL TILE

PORCELAIN TILE PANELS | PORCELAIN COUNTERTOPS

CROSSVILLEINC.COM



Welcome to Crossville, Inc.

We love partnering with designers like you for one simple reason: what inspires you, inspires us.

CREATIVE SOLUTIONS FOR EVERY PROJECT

For more than 30 years, designers and architects, retailers, and specifiers have looked to Crossville for creative solutions. This catalog will familiarize you with our products, services, and complimentary samples. Finding your next inspiration isn't always obvious, but finding the right partner should be.

HIGHEST STANDARDS FROM THE INSIDE OUT

Crossville is a subsidiary of The Curran Group, a family-owned, privately held corporation. We run on the same principles that the Currans are known for in all their business endeavors: family, partnership, integrity, improvement, and respect. Get to know us, and you'll find that our unique value system guides our relationships with employees, business associates, and with you, our customers.



FAMILY OWNED AND DESIGNED IN THE U.S.

As America's first manufacturer of large format porcelain tile, Crossville brings a history of innovation to clients who expect the highest standards inside and out. In fact, a majority of our tile is made here in the United States. As a subsidiary of The Curran Group we remain true to core values of family, partnership, integrity, improvement, and respect.



→

Table of Contents

CROSSVILLE SOLUTIONS

Jniquely Crossville	Cross-Sheen®/Hydrotect™/Exterior Cladding
Special Services	Sustainability PAGE 10
Application Areas PAGE 06	Cleaning PAGE 19
Get Planked Program. PAGE 07	Tile Performance Data Chart PAGE 192
Net DCOF/Safety Considerations	Appendix PAGE 193

PORCELAIN STONE®

If you expect your design materials to rise to the level of your creative vision, Porcelain Stone by Crossville is the clear choice. With hundreds of styles, colors, and sizes, Porcelain Stone provides design flexibility demanded by the nation's top architects and designers. Strong, durable, and stain resistant, it's backed by a no-nonsense warranty.



State of Grace

p.98 Story Teller

p.100

NATURAL STONE

From the casual warmth of multi-stoned slate and the polished elegance of black and white marble, natural stone collections by Crossville provide a tapestry of colors, shapes, and textures to create a beautiful backdrop for living.



GLASS TILE

With Crossville's glass tile, bring your vision to life with creative, colorful designs on walls and ceilings. Play with vibrancy, boldness, or soft pastels and neutrals to create a statement that can't be ignored.



WALL TILE

Bring beauty to a new canvas with Crossville's wall tile. Handmade wall tile gives design a specialized touch in a consistent execution. Lasting looks are brought to life in endless creative solutions.



PORCELAIN TILE PANELS


Fashion and performance driven, Porcelain Tile Panels by Crossville® clear the way for modern style and technical innovation. These large tile panels bring uninterrupted, flawless beauty to space and form.



Porcelain Tile Panels p.143

PORCELAIN COUTERTOPS

Crossville Porcelain Slabs – where creative solutions don't compromise. Other slab materials may stain, crack, or yellow; our 12mm thick 100% porcelain products excel. The same as the porcelain tile and panel products you know, these beautiful designs are built to last.



orcelain Slabs p.181



Uniquely Crossville

DESIGN TOOLS

Planning and visualization tools for designers and architects are available on CrossvilleInc.com/Resources/Tile-101.

FLOOR PATTERNS

Explore nearly 100 floor tile patterns with suggested tile sizes and collections for each.

SELECTING A GROUT

Find the best grout types and colors to complete your tile design.



Request your favorite tile in popular plank sizing (most Crossville collections are eligible, see page 7).

MOSAIC BUILDER

Choose from nearly endless combinations of Crossville glass tile colors and sizes to design custom mosaic for walls, floors, and more.

CROSS-VISION®

Create, save, and print visualizations of paint and flooring combinations, either within stock Crossville environments or via your own uploaded images. Visit our visualizer tools at CrossvilleInc.com/Design-Inspiration/Design-Visualizers.

NATIONAL ACCOUNTS

Clients working on national, multi-location projects face unique challenges and need a partner with the ability to meet their requirements across large geographical areas, ensuring every site consistently receives high quality material on time. That's where the Crossville National Account Team steps in. With extensive experience in the retail, automotive, quick-serve restaurant, convenience, and hospitality segments, our in-house National Accounts Team has what it takes to manage supply chain needs. They provide expert materials forecasting, sales support, order processing, and inventory management.

Contact a National Accounts representative at (931) 484-2110 to learn more about the following:

- Dedicated customer focus with more than 26 years of service to commercial development.
- State-of-the-art logistics to ensure major market delivery 2-3 times per week.
- Special pricing programs to assist with cost-control needs.
- Expert materials forecasting, sales support, order processing, and inventory management.
- Extended product warranties and custom designs for more creative freedom.

GSA ADVANTAGE

Quality Crossville products are available at GSA pricing

Designing for government projects? Our extensive line of award-winning Porcelain Stone floor and wall tile, and our line of accent tiles, is available to government customers at GSA pricing.

Fast delivery

Centrally located in Crossville, Tennessee, we have an industry-leading logistics system to ensure you get your tile when and where you need it, on time and on budget.

On contract

Our GSA contract number is GS-07F-0429 and the TXMAS contract number is TXMAS-5-0560. Our products may also be purchased on state contracts.

Special Services



CROSSVILLEINC.COM



SAMPLE BOARD



SAMPLE CARD BOX SET



CONTRACTOR BOARD



JEWELRY CARDS



BROCHURE

ORDERING SAMPLES

Order complimentary samples in the color of your preference at **CrossvilleInc.com**.

OTHER SPECIAL SERVICES INCLUDE:

- Loose samples are free for architects and designers. See back cover for details.
- Chip kits are available through your local distributor.
- Custom patterns using 3x3 mosaics may be ordered through your local distributor; please allow adequate lead time.
- Crosstyle® provides custom cutting of any Crossville Porcelain Stone tile into any geometric, straight-edged piece 2x2 or larger.
- Crossville now offers each of its Porcelain Stone products in popular plank shapes, with no minimum order and quick order fulfillment (most Crossville collections are eligible).
- Given the extreme hardness and durability of Crossville Porcelain Stone, cutting the tile or drilling holes requires specific blades and drill bits. Go to CrossvilleInc.com, and visit the Resources/Installation Guide section for our cutting and core drilling guides.
- Crossville offers an online booklet of pattern layout designs called the "Pattern Book." Contact your local distributor or visit Crossville's website at CrossvilleInc.com.
- Crossville offers custom color service. Minimum order requirement and special set-up fees apply.
- Crossville offers Cross-Grid®, a process that grinds all four sides of our Porcelain Stone tiles. This squaring is also called rectified, and it allows the tile to be installed with narrower grout joints.
- Crossville's website offers a variety of additional tools and information valuable to both professionals and homeowners.



SAMPLE FOLDER

Application Areas

			ns (h)	A 18. A	*	Meled II	,	38.	*(5)	ilie *	The Aller
	988	Hinish	Interior Flors (gr.)	Mericalists (Net and Malk	Enerior Walls	Sterior Congress.	Counters	Meiorfoos Smile Was	Library 15/4	Pour Dough	Weer ine Root
Porcelain Stone (field tile											
ılaska™	24	UPS	~	~	~	~	~	Mosaic Only		~	~
Itered State	28	UPS	~	~	~	~	~			~	~
argent	30	UPS	~	~	~	~	~			~	~
ugent	30	HON	~	~	~	~	~			~	~
Basalt	34	UPS	~	~	~	~	~			~	~
Bluestone	36	UPS	~	~	~	~	~	v †		~	~
didestorie	30	HON	~	~	~	~	~			~	~
Color Blox® 2.0 / Color Blox® 2.0 Mosaics	38	UPS	~	~	~	~	~	Mosaic Only		~	~
Cross-Colors® Mingles	42	PO	· ·	~	· ·	~	~			~	~
Stoss-Colors Willigles	42	UPS	~	~	~	~	~			~	~
Cross-Slate®	44	CS		~	~	~	~	~	~	~	~
Cross-Tread®	44	CTS	~		~	~		~	~		
EcoCycle Americana®	46	UPS	· ·	~	· ·	·	~	· ·	·	~	~
		PO	~	~	~	~	~			~	~
Empire	48	UP		· ·		· ·	· ·	Mosaic Only		~	~
	F.0	UPS		~		~	~	✓†		~	~
amiliar Territory™	50	SPO	· ·	~	· ·	·	· ·	V		~	~
Garden	52	TX	· ·	~	· ·	·	•	~	~	· ·	· ·
Gotham®	54	UPS						•	•		
		UPS	<u> </u>	· ·		•	· ·	Marata Oala		<u> </u>	*
ava Joint	56	UPS	<u> </u>	· ·	<u> </u>	·	· ·	Mosaic Only		· ·	· ·
azz Age™	58		· ·	· ·	· ·	~	· ·	Mosaic Only		· ·	*
Main Street	60	UPS	~	~	~	~	~	v †		~	~
Moonstruck	62	UPS	~	~	~	~	~			~	~
		HON	· ·	~	· ·	~	~			~	~
lest®	68	UPS	~	~	~	~	~	Mosaic Only		~	~
Votorious® 72	72	UPS	Y	~	Y	~	~	Mosaic Only		~	~
		HON	~	~	~	~	~			~	~
Physics	74	UPS	~	~	~	~	~	Mosaic Only		~	~
		PO	~	~	~	~	~			~	~
Portugal	76	UPS	~	~	~	~	✓	Mosaic Only		~	*
		EXT	~	~	~	~	~		~	~	~
Ready to Wear	80	UPS	~	~	~	~	✓			~	~
Reformation™	82	UPS	~	~	~	~	✓	Mosaic Only		~	~
Relax™	86	UP	~	~	~	~	✓	Mosaic Only		~	~
Retro Active 2.0	88	PO	~	~	~	~	✓			~	~
		UPS	~	~	~	~	✓	Mosaic Only		~	~
		PTN	~	~	~	~	~			~	~
Shades 2.0	92	UPS	~	~	~	~	~	Mosaic Only		~	~
		SPO	~	~	~	~	~	Mosaic Only		~	~
		PTN	~	~	~	~	~			~	~
SpeakEasy	96	UPS	~	v	~	~	~			~	~
State of Grace	98	UPS	~	~	~	~	~	Mosaic Only†		~	~
and or drago		SAT	~	~	~	~	~			~	~
Story Teller™	100	UPS	~	~	~	~	~	Mosaic Only		~	~
Glass & Wall Tile											
Color By Numbers®	128	Satin/		~							
		Gloss									
Convergence	114			~							
Cursive™	132	Gloss		~							
bb & Flow	116			~		~					
alass Blox®	118			~		~					Mosaic Only
Groove Glass	122			~		~					Mosaic Only
landwritten	134			~							
Sideview Glass	124	Matte/ Polished		~							
		Satin/									
Simpatico	136	Gloss		~							
Swatches™	138	Satin/ Gloss		~							

^{*} Excludes mesh mounted mosaics. Contact your Crossville sales representative for more information.

NOTE: Trim applications will differ from field tile applications for the same series. $\dagger\,2x2$ or 3x3 UPS mosaic only, see Tile Performance Data Chart for additional information on wet area use for mosaic tiles.

Get Planked®Program

NEED IT IN PLANKS?

Found the perfect tile, but need it in planks?

Crossville now offers each of its Porcelain Stone products in popular plank shapes. With no minimum order and quick order fulfillment, you'll be seeing planks in no time.

Depending on the product selected there are 4 possible widths and 7 possible lengths, which add up to more than 2,596 shape combinations.

Many of Crossville's tiles are now available in the much-requested Half-Plank size (square tile cut in half). For the latest information about half-planked tile, please visit CrossvilleInc.com or phone: 931.484.2110





Wall: Main Street | AV214 Gallery Grey | AV215 Boutique Black Designed by: The Miller Hull Partnership

Get Planked Sizes*





Wet DCOF/Safety Considerations

DCOF ACUTESTSM

The Wet DCOF AcuTestsm is the new standard for accurately determining the actual coefficient of friction on a tile surface. Developed by the Tile Council of North America (TCNA), the Wet DCOF (Dynamic Coefficient of Friction) AcuTest is a repeatable, reproducible method of measuring DCOF. This method uses a specifically engineered device to perform the required testing, ensuring the most precise results. The Wet DCOF AcuTest is included in the latest version of ANSI A137.1 Specifications for Ceramic Tile.

SAFETY CONSIDERATIONS FOR TILE

- In areas where standing water may occur, selected tile should have an elevated DCOF rating. Please refer to the "Tile Performance Data" page for additional information.
- Polished tile should not be used in areas where standing water, oil, or grease may be present due to the tile's low coeffi ient of friction.
- Pool deck tiles, whether interior or exterior, should have a surface texture that provides an elevated DCOF rating.
 Please refer to the "Tile Performance Data" page for additional information.
- Ramps or inclines should have an increased DCOF.
- There are no tiles that are slip proof, only slip resistant.



The Tile Council of North America (TCNA), established in 1945, has a leadership role in promoting the use of ceramic tile and in developing North American and international industry standards. To learn more about TCNA, please go to **tcnatile.com**.

Product	Finish	Wet DCOF Range
Empire	PO	0.22 - 0.32
Cross-Colors® Mingles	PO	0.31 - 0.41
Physics	PO	0.31 - 0.41
Retro Active 2.0	PO	0.31 - 0.41
State of Grace	SAT	0.31 - 0.41
Alaska	UPS	0.42 - 0.52
Altered State	UPS	0.42 - 0.52
Argent	HON	0.42 - 0.52
Bluestone	HON	0.42 - 0.52
EcoCycle Americana®	UPS	0.42 - 0.52
Empire	UP	0.42 - 0.52
Familiar Territory [™]	SPO	0.42 - 0.52
Java Joint	UPS	0.42 - 0.52
Jazz Age™	UP	0.42 - 0.52
Moonstruck	HON	0.42 - 0.52
Nest®	UPS	0.42 - 0.52
Notorious®	HON	0.42 - 0.52
Reformation™	UPS	0.42 - 0.52
Relax™	UP	0.42 - 0.52
Retro Active 2.0	PTN	0.42 - 0.52
Shades 2.0	SPO	0.42 - 0.52
State of Grace	UPS	0.42 - 0.52
Story Teller™	UPS	0.42 - 0.52
Argent	UPS	0.50 - 0.60
Basalt	UPS	0.50 - 0.60
Bluestone	UPS	0.50 - 0.60
Color Blox® 2.0/Color Blox® 2.0 Mosaic	UPS	0.50 - 0.60
Cross-Colors® Mingles	UPS	0.50 - 0.60
Familiar Territory™	UPS	0.50 - 0.60
Garden	TX	0.50 - 0.60
Gotham®	UPS	0.50 - 0.60
Moonstruck	UPS	0.50 - 0.60
Notorious®	UPS	0.50 - 0.60
Physics	UPS	0.50 - 0.60
Portugal	UPS	0.50 - 0.60
Ready to Wear	UPS	0.50 - 0.60
Retro Active 2.0	UPS	0.50 - 0.60
Shades 2.0	UPS	0.50 - 0.60
SpeakEasy	UPS	0.50 - 0.60
Main Street	UPS	0.58 - 0.68
Portugal	EXT	0.60 – 0.70

The defining threshold value is 0.42 for level interior spaces expected to be walked upon when wet, a wet DCOF of less than 0.42 shall only be installed when the surface will be kept dry when walked upon and proper safety procedures will be applied when cleaning the tiles.

Finishing, Coating, and Cladding

CROSS-SHEEN®

- · Protect tile from stains, scuffs, and graffiti
- Integrated invisible finish that requires only a mild cleaner for hassle-free maintenance.
- Applicable to exterior and interior walls as well as interior flooring for commercial or residential.
- Exclusively from Crossville and made in the U.S. to stringent specifications
- Visit us online for usage of Cross-Sheen in the redesign of DeAnza High School, Ashland Youth Center, and others.

W HYDROTECT™ COATING

- Revolutionary invisible coating self-cleans exteriors against dirt, grime, algae, and pollution.
- Applicable to floors and walls, indoors and outside.
- No toxic chemicals needed to maintain that Day 1 look for years to come.
- Purifies exterior air by reducing greenhouse gases, environmental pollutants, and volatile organic compounds in the presence of UV light.
- A 10,000-square-foot area of tiles can clean the air as effectively as 70 poplar trees or green space the size of four tennis courts.

To learn more about Cross-Sheen and Hydrotect visit CrossvilleInc.com/Resources/Tile-101/Finishes-Coatings.

EXTERIOR CLADDING

- Offers both aesthetic appeal and structural functionality.
- Graffiti resistant and appropriate for all kinds of environments.
- Engineered for utility savings due to thermal mass advantages.
- Contact us at crossc@crossvilleinc.com to learn more.



Sustainability

RECYCLED CONTENT

At Crossville, sustainability is at the heart of all that we do. Our products contain recycled content that is a mix of material from our own manufacturing processes, previously fired tile, and post-manufactured waste from other sources. The amount and source of our recycled material varies by production run in an effort to reduce overall environmental impact. For this reason, we are no longer reporting minimum recycled content by series.

As part of our contribution to LEED V4 & V4.1 projects, we ask that you use Crossville's other applicable resources, including EPD's, HPD's, Declare Labels, Green Squared, and more found here www.crossvilleinc.com/Resources/Sustainability

RECYCLED PRODUCTS

Crossville recycles nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling. Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back™ Program. For more information, visit CrossvilleInc.com/green.

TILE TAKE-BACK® PROGRAM

With our Tile Take-Back Program, Crossville, the tile industry's leader in sustainable initiatives, solves the major environmental problem facing the tile industry today: recycling fired tile.

Previously, pre and post-consumer tile has been considered non-recyclable. While many tile manufacturers, including Crossville, have successfully reused scrap powders and unfired tile, hundreds of millions of pounds of damaged or otherwise unsellable fired tile (tile in its finished state), have gone to landfills each year. Additionally, there has been no environmentally friendly manner to dispose of previously installed tile.

We have developed a proprietary system of processing porcelain tile back into powder used in manufacturing new tile. The resulting new products will have a verifiable recycled content, and more than 4 million pounds of tile that Crossville previously sent to local landfills will be recycled. This is in addition to any tile Crossville will receive through our ground-breaking Tile Take-Back Program. Not only will the new process allow Crossville to repurpose its own scrap tile, but will allow the company to take back samples and previously installed tile, always a concern for environmentally-minded designers and building owners.

LIVING PRODUCT CHALLENGE

As Crossville re-invigorates new lines, we strive to make them as environmentally friendly as possible. For this reason, we have partnered with the International Living Future Institute for the Living Product Challenge.

Using the Living Product Challenge framework, consumers can choose products that are healthy and free of toxins, know that manufacturers are socially responsible and respect the rights of workers, and that benefit both people and the environment.

Crossville is choosing to certify new products as part of a commitment to a healthy world by following the standards set for in the Living Product Challenge. Retro Active 2.0 has been awarded petals for Place, Water, and Beauty. Our newest 2.0 products - Shades 2.0 and Color Blox 2.0 - are currently in review.



Please refer to CrossvilleInc.com for product information. For more information on the Living Product Challenge visit www.living-future.org/lpc

Sustainability

SUSTAINABLE OPERATIONAL PROCEDURES

In order to minimize our impact on the environment, Crossville's sustainable operational procedures include:

- Printing of marketing materials at Forestry Stewardship Council certified facilities; use of soy inks and recycled paper whenever possible.
- Packaging of samples, merchandising materials, and piece goods with recycled/recyclable wrapping and cushioning.
- Company-wide recycling program for all office and production facility paper waste.

GREEN SQUARED™ CERTIFICATION

The standard in sustainability for the tile industry in North America is ANSI A138.1. Crossville was among the first manufacturers to achieve Green Squaredsm certification for its entire U.S. manufactured porcelain tile product line-up, which is manufactured in Crossville, TN, as well as its production processes. Green Squared is the stringent and powerful measure for tile industry sustainability developed by Tile Council of North America under the American National Standards Institute (ANSI) process.

Green Squaredsm

- Evaluates products and processes in five key environmental and social categories:
 - Product characteristics
 - · Manufacturing operations
 - Corporate governance
 - Innovation
 - End-of-life product management
- Recognizes manufacturers for leadership in environmental stewardship and corporate responsibility.
- Serves as the standard bearer to ensure transparent, full disclosure of sustainability product, manufacturer by manufacturer industry wide.

ECOCYCLE TILE PROCESS™

Through the EcoCycle Tile Process[™], Crossville recycles millions of pounds of tile waste each year that would otherwise be sent to landfills. The two-pronged, proprietary process addresses the recycling of fired tile and filtrate waste. It's a major contributor to Crossville's status as a net consumer of waste (the company consumes more waste than it send to landfills)—a distinction that no other domestic tile manufacturer has yet to achieve.















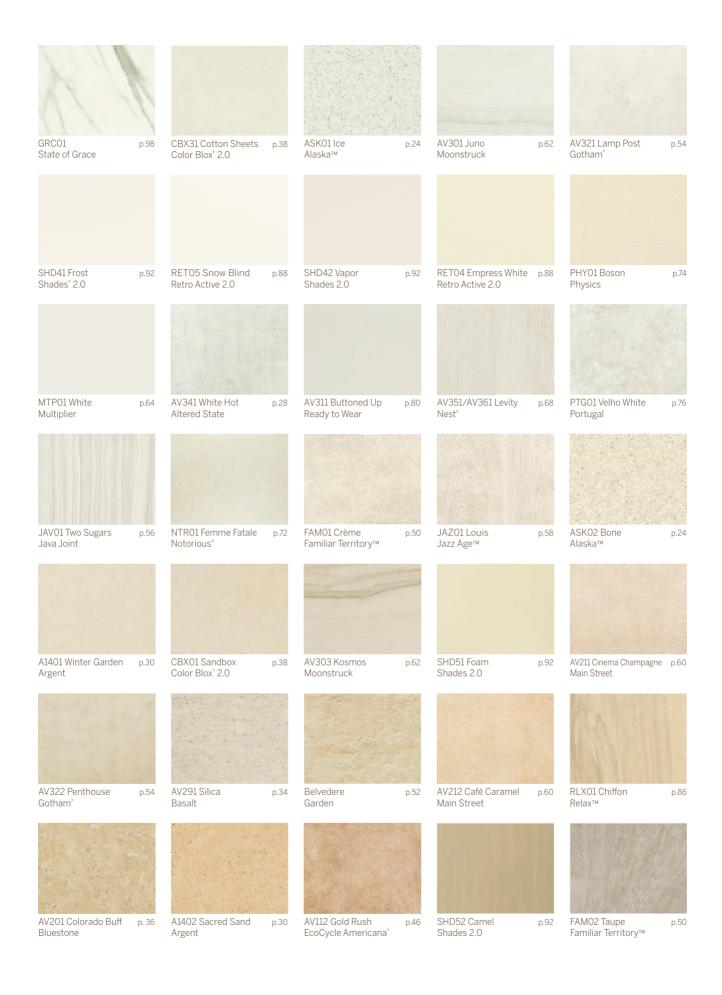

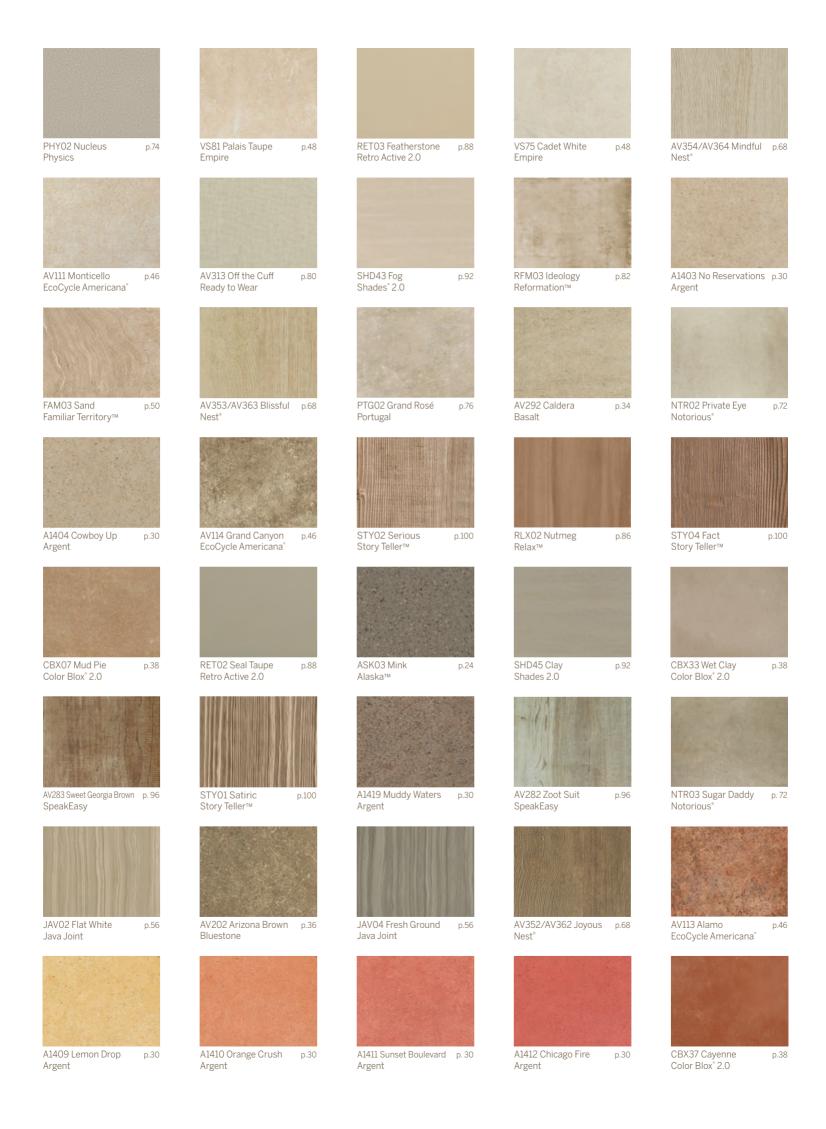

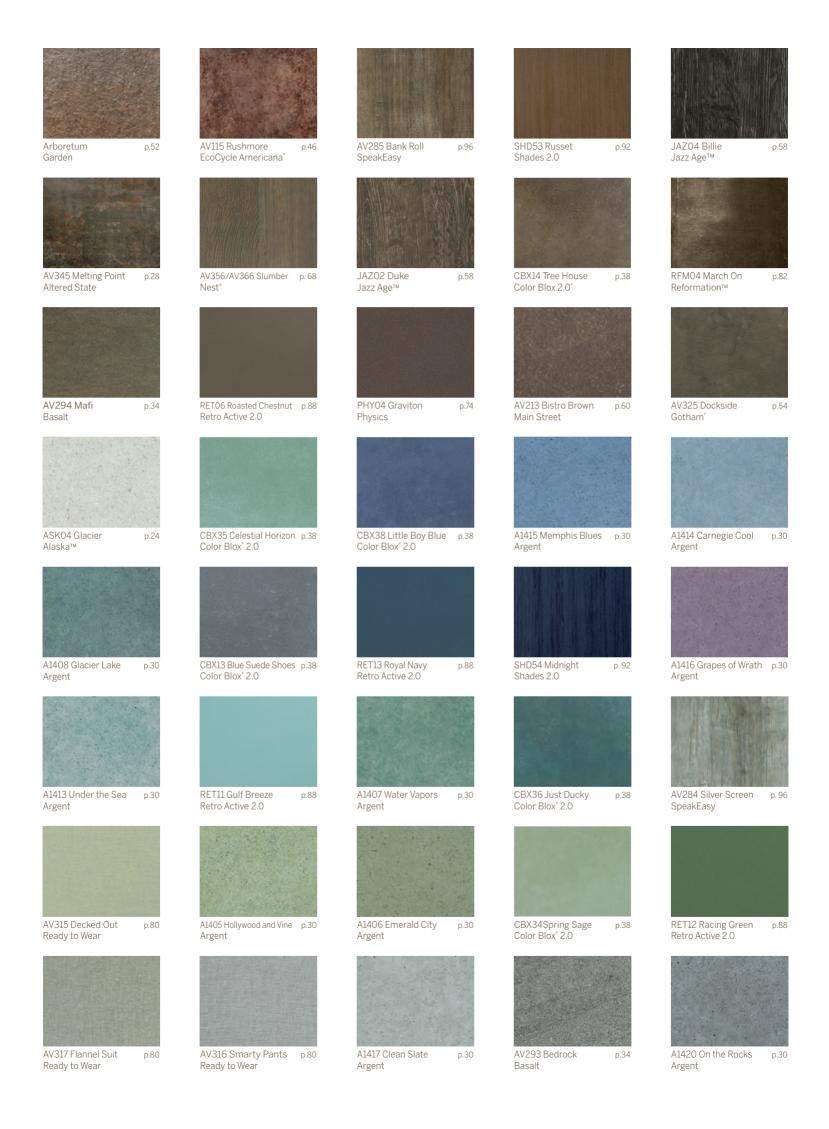

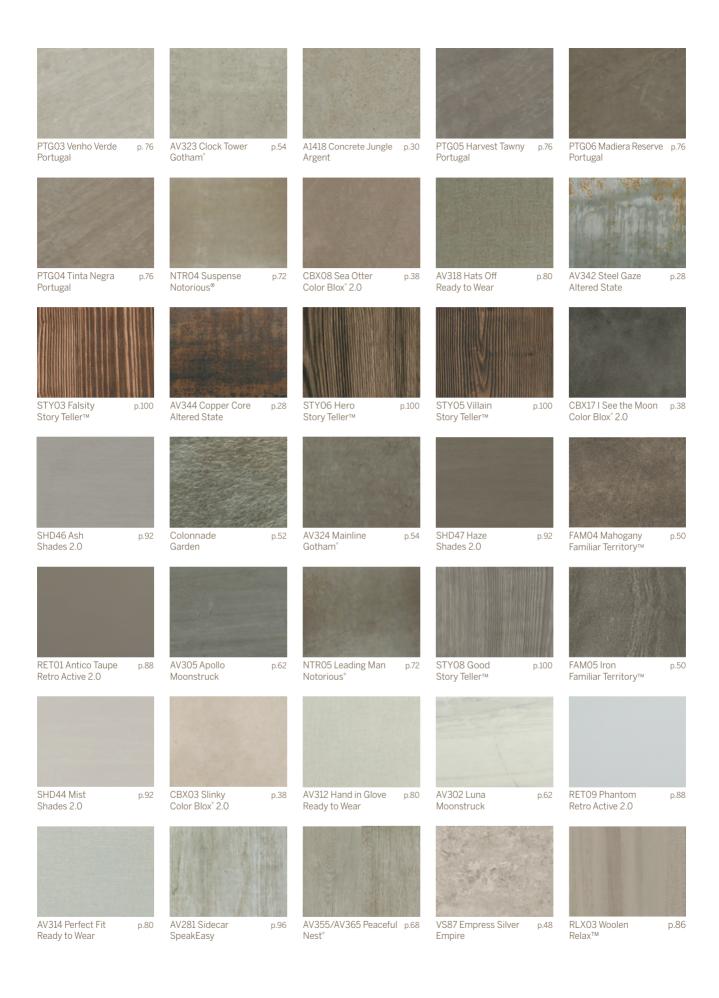





AV343 Acid Wash p.2 Altered State







Porcelain Stone®



ALASKA™
ARGENT
BASALT
BLUESTONE

COLOR BLOX® 2.0

COLOR BLOX® 2.0 MOSAIC CROSS-COLORS® MINGLES

ECOCYCLE AMERICANA®

EMPIRE

FAMILIAR TERRITORY™

GARDEN

GOTHAM®

JAVA JOINT

JAZZ AGE™

MAIN STREET

MOONSTRUCK

MULTIPLIER

NEST®

NOTORIOUS®

PHYSICS

PORTUGAL

READY TO WEAR

REFORMATION™

 $\mathsf{RELAX^{\mathsf{TM}}}$

RETRO ACTIVE 2.0


SHADES 2.0

SPEAKEASY

STATE OF GRACE

STORY TELLER™



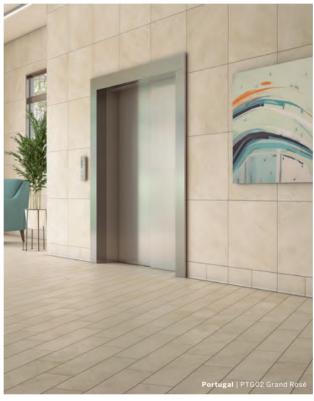











ASK04 Glacier



ASK02 Bone



ASK05 Tundra



ASK03 Mink

Mosaics



ASK01.10202MOS Ice 2x2 Mosaic



ASK01.1POLYMOS



Ice Polygon Mosaic



ASK03.10202MOS Mink 2x2 Mosaic



Mink Polygon Mosaic



ASK05.10202MOS ASK05.1POLYMOS Tundra 2 x 2 Mosaic Tundra Polygon Mosaic



ASK02.10202MOS Bone 2 x 2 Mosaic



ASK04.10202MOS Glacier 2 x 2 Mosaic



ASK02.1POLYMOS Bone Polygon Mosaic



ASK04.1POLYMOS Glacier Polygon Mosaic















Sizes & Finishes (Available in all colors)

FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	10.5	3	UPS
24 x 24	597 x 597	10.5	3	UPS
24 x 48	597 x 1197	10.5	3	UPS

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	10.5	3	UPS
Polygon Mosaic**	341 x 385	10.5	2	UPS

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	97 x 597	10.5	3	UPS





6 x 12 Cove Base


4 x 24 Single Bullnose


Recommended Use

Alaska is recommended for interior floors, walls, coutertops, and exterior walls in both residential and commercial applications. Alaska is not recommended for exterior horizontal surfaces or exterior paying. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)





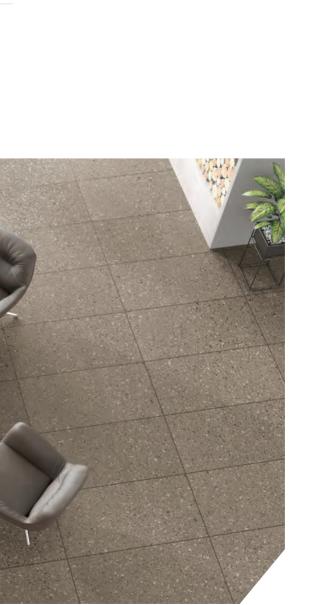

^{*} Mounted on 12 x 12 sheet with 3mm grout joints. ** Mounted on 13 x 15 sheet with 2mm grout joints.







AV341 White Hot



AV344 Copper Core



AV342 Steel Gaze



AV345 Melting Point



AV343 Acid Wash

Sizes & Finishes (Available in all colors)

FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 24	147 x 597	10.5	3	UPS
12 x 24	297 x 597	10.5	3	UPS
24 x 24	597 x 597	10.5	3	UPS
AUG THE CONTRACT				

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.
Please note: Tile is directional. Please install accordingly.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 12 Mosaic*	47 x 297	10.5	3	UPS

^{*} 2×12 mosaic is mounted on a 297×297 sheets with a 3mm grout joint. The 2×12 mosaic can be used in linear drain shower pans as long as the 12 inch side runs parallel to the drain.

COORDINATING TRIM (Available in all colors)

Nominal (in)	,	Thickness (mm)	Grout Joint (mm)	Finish
6 x 24 Single Bullnose	147 x 597	10.5	3	UPS



6 x 24 Single Bullnose

Recommended Use

Altered State is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Altered State is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)





12 x 24





2 x 12 Mosaic













Wet DCOF (UPS) **0.42 - 0.52**




Wall: **Argent** | A1410 Orange Crush | A1419 Muddy Waters Floor: **Argent** | A1403 No Reservations Regal Cinemas Three Rivers Designed by: BB Architects, Inc.

A1416 Grapes of Wrath

UPS/HON

A1417 Clean Slate

UPS/HON

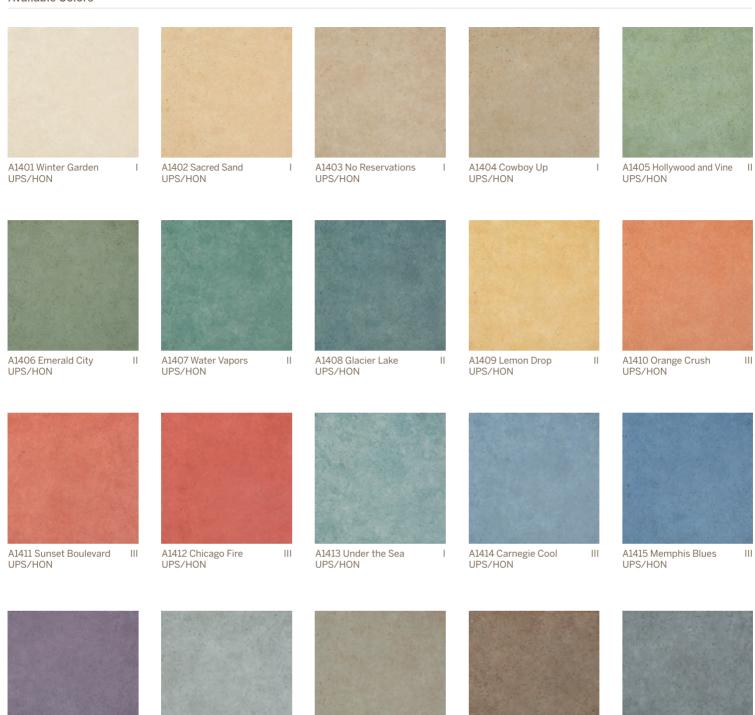

Price	Groups

A1420 On the Rocks

UPS/HON

П

I	Group I
II	Group II
Ш	Group III





A1418 Concrete Jungle

UPS/HON





A1419 Muddy Waters

UPS/HON







Sizes & Finishes

FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 6*	147 x 147	9.5	3	UPS
6 x 24*	147 x 602.5	9.5	3	UPS
12 x 24	299 x 602.5	9.5	3	UPS/HON

HON (Honed finish) is semi-polished.

All field tiles except 12 x 12* are rectified. Crossville recommends a minimum 3mm grout joint.

12 x 12 is non-rectified, Crossville recommends a minimum 3/16" grout joint.

Nominal (in)	Actual (in)	Thickness (mm)	Grout Joint (in)	Finish
12 x 12*†	11-13/16 x 11-13/16	9.5	3/16	UPS

 $[\]ensuremath{^{*}}$ HON finish available through special order.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base*	147 x 299	9.5	3	UPS
4 x 12 Bullnose	96 x 299	9.5	3	UPS





⁶ x 12 Cove Base 4 x 12 Sing (Universal, flat top) All colors

Recommended Use

Argent is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Argent is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.


See CrossvilleInc.com for detailed installation instructions.









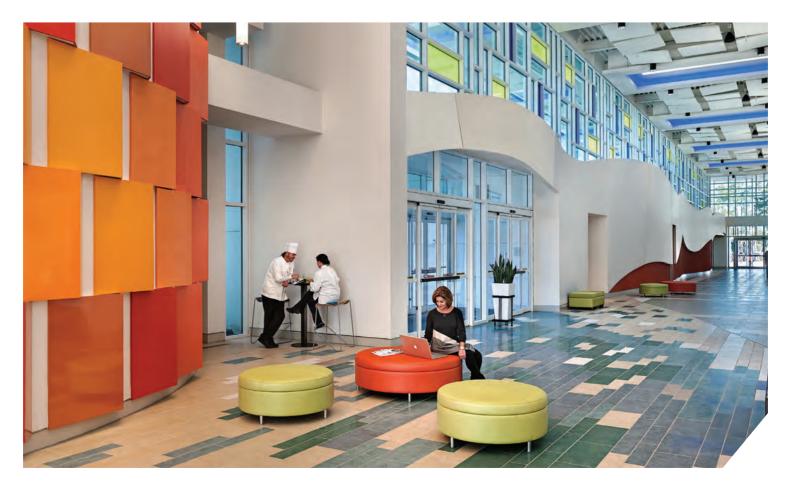

[†] Calibrated and measured in inches.

^{*} Available only in A1401, A1402, A1403, A1404, A1417, A1418, A1419, and A1420





AV291 Silica



AV293 Bedrock



AV292 Caldera



AV294 Mafic



AV295 Magma

12 x 12

12 x 24

Sizes & Finishes (Available in all colors)

Company of the control of the contro						
FIELD TILE						
Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish		

11-13/16 x 11-13/16

11-13/16 x 23-13/16

All field tile is calibrated (non-rectified). Crossville recommends a minimum 3/16" grout joint.

COORDINATING TRIM (Available in all colors)

Nom	ninal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 1	2 Bullnose	3-3/4 x 11-3/4	3/8	3/16	UPS
6 x 1	2 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS

3/8

3/8

3/16

3/16

UPS

UPS

6 x 12 Cove Base

4 x 12 Bullnose

Recommended Use

Basalt is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Basalt is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



12 x 24



12 x 12











Wet DCOF (UPS) **0.50 - 0.60**



AV201 Colorado Buff UPS



AV202 Arizona Brown UPS



AV203 Pennsylvania Blue UPS



AV204 Vermont Black UPS



AV201 Colorado Buff HON



AV202 Arizona Brown HON



AV203 Pennsylvania Blue HON



AV204 Vermont Black HON

Sizes & Finishes (Available in all colors)

FIELD TILE	A -1 -1 /	TI : 1	0 - 11:1/	Process.
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	FINISN
6 x 6	147 x 147	10.5	3	UPS/HON
6 x 24	147 x 597	10.5	3	UPS/HON
12 x 12	297 x 297	10.5	3	UPS/HON
12 x 24	297 x 597	10.5	3	UPS/HON
24 x 24	597 x 597	10.5	3	UPS/HON

Note: All field tile is rectified.

Crossville recommends a minimum 3mm grout joint. HON (Honed finish) is semi-polished.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2*	47 x 47	10.5	3	UPS
3 x 6**	72 x 147	10.5	3	HON
Random***			3	
2 x 2	47 x 47	10.5	3	UPS/HON Mixed
2 x 4	47 x 97	10.5	3	UPS/HON Mixed
2 x 6	47 x 147	10.5	3	UPS/HON Mixed
* 2 v 2 managia tila manumtar	1 am 207 v 207 abaata			

- * 2 x 2 mosaic tile mounted on 297 x 297 sheets. ** 3 x 6 mosaic tile mounted on 297 x 372 sheets (staggered joints). *** 2 x 2, 2 x 4 and 2 x 6 mosaic tile mounted on 297 x 322 sheets.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 12 Single Bullnose	97 x 297	10.5	3	UPS/HON
6 x 12 Cove Base	150 x 297	9.5	3	UPS
6 x 8 Cove Base Corners	150 x 200	9.5	3	UPS
Left & Right				
6 x 12 Cove Base (Universal flat top)	4 x 12 Single Bullnose	6 x 8 Cove Base Cor (Flat Top)	ner Left 6 x 8 Cove (Flat Top)	Base Corner Right


Recommended Use

Bluestone is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Bluestone is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas where standing water may

occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)

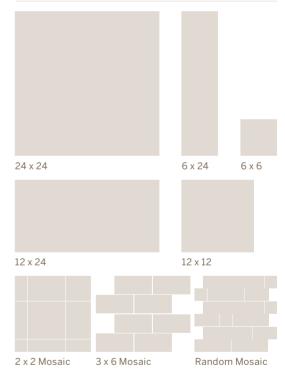

Wet Area Use for Mosaic













Wet DCOF (UPS) **0.50 - 0.60** (HON) 0.42 - 0.52







CBX03 Slinky



CBX07 Mud Pie



CBX08 Sea Otter



CBX14 Tree House



CBX13 Blue Suede Shoes



CBX17 | See the Moon



CBX31 Cotton Sheets



CBX32 Boot Black



CBX33 Wet Clay



CBX34 Spring Sage



CBX35 Celestial Horizon




CBX36 Just Ducky



CBX37 Cayenne



CBX38 Little Boy Blue

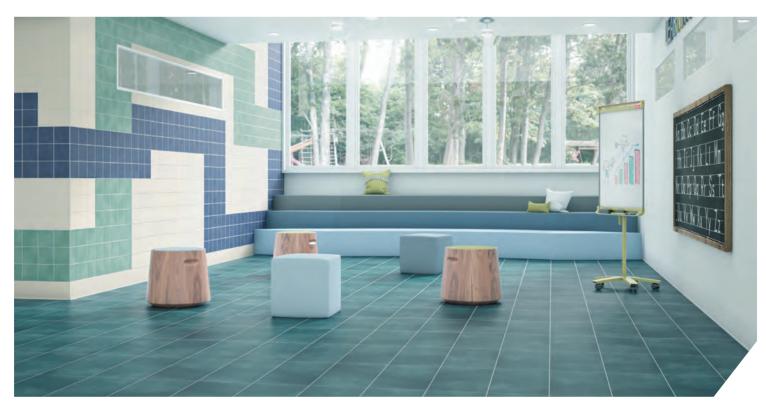

Color Blox® 2.0 | CBX36 Just Ducky, CBX31 Cotton Sheets, CBX35 Celestrial Horizon and CBX38 Little Boy Blue













Wet DCOF (UPS) **0.50 - 0.60** Field Tile



Sizes & Finishes

FIELD TILE Nominal (in) Actual (in) Thickness (mm) Grout Joint (in) Finish 4 x 12* UPS 3-3/4 x 11-3/4 9.5 3/16 6 x 6 5-13/16 x 5-13/16 9.5 3/16 UPS 12 x 12 11-13/16 x 11-13/16 9.5 3/16 UPS 9.5 12 x 24 11-13/16 x 23-13/16 3/16 **UPS** 24 x 24** 9.5 UPS 3/16 23-13/16 x 23-13/16

All field tile is calibrated (non-rectified).

Crossville recommends a minimum 3/16" grout joint.


MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
3 x 3*	2-7/8 x 2-7/8	6.4	1/8	UPS

^{*} 3 x 3 Mosaic Tile in 11-3/4 x 11-3/4 sheets with a 1/4 inch grout joint.

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (mm)	Grout Joint (in)	Finish
3 x 3 Mounted Bullnose 1 Linear Foot	2-7/8 x 2-3/4	6.4	1/8	UPS
3 x 3 Bullnose Corner	2-7/8 x 2-7/8	6.4	1/8	UPS
3 x 3 Mounted Cove Base 1 Linear Foot	3-5/8 x 11-3/4	6.4	1/8	UPS
4 x 24 Single Bullnose	3-3/4 x 23-13/16	9.5	3/16	UPS
4 x 12 Bullnose Corner Left & Right	3-3/4 x 11-3/4	9.5	3/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	9.5	3/16	UPS
6 x 8 Cove Base Corner Left & Right	5-7/8 x 7-3/4	9.5	3/16	UPS







(Flat Top)



(Flat Top)






3 x 3 Mounted Cove Base 1 Linear Foot (Flat Top)

Recommended Use

Color Blox® 2.0 is recommended for interior floors, walls, countertops, and exterior walls in both commercial and residential applications. Color Blox is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)




24 x 24



12 x 24



12 x 12



3 x 3 Mosaic Wet Area Use for Mosaic

See Tile Performance Data chart.



^{*} Custom Cut Program. Allow 2-4 weeks based on availablity for delivery.

^{** 24} x 24 is available in these colors only: CBX01, CBX03, CBX07, CBX08, CBX14, CBX17, CBX31, CBX32 and CBX33





Cross-Colors®

- A variety of textures and finishe
- Numerous trim options available
- Field Tile Calibrated
- Contemporary color palette designed by one of the industry's top color forecasters
- Recommended grout joint: 3/16"

Visit the website to learn more: CrossvilleInc.com/Products/Cross-Colors-Mingles









A790 Burgundy Smoke*



A675 Stonehenge*



A233 Sand Bisque*



A825 Mercury*



A900 Mica*



A850 Graphite*



A880 Onyx*



R001 Grey Mingle

Sizes & Finishes

FIELD TILE

O/CS
S/CTS
O/CS

This tile is calibrated (non-rectified)

Crossville recommends a minimum 3/16" grout joint.

Note: The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule.

Example Sizes (Field tile available in all colors)



12 x 12

COORDINATING TRIM

Trim Program (available in UPS finish only)

Size	6 x 8 Cove Base(in)	1 x 6 Inside Cove Base Corners(in)	6 x 8 Left & Right Cove Base Corner(in)	4 x 8 Bullnose(in)	4 x 8 Left & Right Bullnose Corners(in)	4 x 8 Bullnose Stair Tread(in)
Actual	5-7/8 x 7-3/4	1 x 5-7/8	5-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4
Thickness	5/16	_	5/16	5/16	5/16	5/16





Cove Base Corner



Cove Base Corner - Left (Round Top)











Stair Tread

Recommended Use

Cross-Colors (UPS) is recommended for interior floors, walls, countertops, and exterior walls in both commercial and residential applications. Cross-Colors (PO) is recommended for interior floors (except where standing water may occur), walls, countertops and exterior walls in both residential and commercial environments

See CrossvilleInc.com for detailed installation instructions.











Wet DCOF (UPS) **0.50 - 0.60** (PO) 0.31 - 0.41

^{*} Cross-Sheen® finish for easy cleaning available on UPS only.

^{*} These colors are inventoried in cut/bevel 6 x 6, UPS finish, at Crossville. All other 6 x 6 Polished and Cross-Slate tiles are special order.

Crossville offers designers, architects, and builders the utilitarian textures to answer the specific needs of those areas with the highest exposure. These textures are an integral part of the tile and cannot be worn down. No matter how technical the specifications, we have a surface that is highly functional, yet able to blend beautifully with any design application. Please refer to the Tile Performance Data chart in the back of this catalog for actual tile performance details.

Unpolished (UPS)

Cross-Sheen fin sh imparts a subtle glow to an unpolished surface that enhances color and allows scuffs, stains, and even permanent marker and graffiti to be easily removed. Unpolished with Cross-Sheen fin sh is appropriate hightraffic interior fl ors and walls where low maintenance is desired. Unpolished with Cross-Sheen fin sh is not recommended for wet areas where standing water may occur or for exterior horizonal and/or walking surfaces.


Polished (PO)

Polished Porcelain Stone is a practical alternative to natural stone with its attractive, mirror-like fin sh and can be used with other surface textures to increase visual interplay and interest. Polished fin sh adds a look of elegance and sophistication to interior flors and interior and exterior walls. Polished fin sh is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.



Cross-Slate® (CS)

The Cross-Slate fin sh combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone for strong commercial value where enhanced traction is needed. Cross-Slate is recommended for high-traffic interior and exterior walking surfaces in both residential and commercial environments.




Cross-Tread® (CTS)

Enhanced traction and ease of maintenance make this texture a suitable choice for wet and greasy interior fl or areas and exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile.

Wet DCOF Unpolished 0.50 - 0.60Polished 0.31 - 0.41

 $\mathsf{Cross\text{-}Tread}^{\scriptscriptstyle{\textcircled{\tiny{\$}}}}$ 0.50 - 0.60Cross-Slate® 0.50 - 0.60

*The increased real world traction of these types of surfaces cannot be fully realized by our current DCOF testing methodologies due to their exaggerated facial structure.

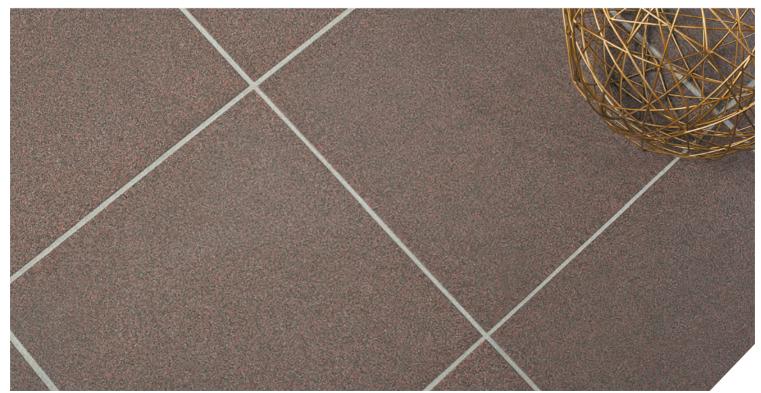



EcoCycle Americana®

- Competitively priced for exceptional value
- Deep hues go all the way through the tile, making the body an integral part of the overall color
- Recommended grout joint: 3/16"
- Field Tile Calibrated
- Cross-Sheen Finish for easy cleaning (UPS only)
- Rounded edges allow for a smoother transition

Visit the website to learn more:

Crossvilleinc.com/Products/EcoCycle-Americana



AV111 Monticello



AV113 Alamo



AV112 Gold Rush



AV115 Rushmore



AV114 Grand Canyon



Example Sizes (Field tile available in all colors)

AV116 Plymouth Rock

Sizes & Finishes (Available in all colors)

FIELD TILE				
Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
12 x 12	11-3/4 x 11-3/4	5/16	3/16	UPS
18 x 18	17-3/4 x 17-3/4	3/8	3/16	UPS

This tile is calibrated (non-rectified). Crossville recommends a minimum 3/16" grout joint.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish	
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	3/16	UPS	
6 x 12 Cove Base	5-7/8 x 11-3/4	5/16	3/16	UPS	



6 x 12 Cove Base (Universal, flat top)



4 x 12 Single Bullnose

18 x 18



12 x 12

Recommended Use

 ${\sf EcoCycle\ Americana\ is\ recommended\ for\ interior\ floors, walls, countertops, and\ exterior\ walls.\ {\sf EcoCycle\ }}$ Americana is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.













Wet DCOF (UPS) **0.42 - 0.52**



Empire

- All colors available in polished and unpolished finishe
- Extensive selection of trim, including unique 6 x 12 cove base
- Sizes rectified to mix and match a variety of patterns
- Field Tile Rectifie
- Recommended grout joint: 3mm

Visit the website to learn more:

CrossvilleInc.com/Products/Empire



VS75 Cadet White UP



VS81 Palais Taupe UP



VS85 General's Grey UP



VS87 Empress Silver PO



VS86 Black Swan UP



VS75 Cadet White PO



VS81 Palais Taupe PO



VS85 General's Grey PO



VS87 Empress Silver UP



VS86 Black Swan PO

Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 12	297 x 297	10.5	3	UP/PO
12 x 24	297 x 597	10.5	3	UP/PO
24 x 24	597 x 597	10.5	3	UP/PO

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	297 x 297	10.5	3	UP

 $^{*2 \}times 2$ mosaic mounted on 297 \times 297 sheets with a 3mm grout joint. UP finish only.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	97 x 597	10	3	PO, UP
6 x 12 Cove Base	150 x 298	9.5	3	UP
6 x 8 Cove Base Corner Left & Right	150 x 200	9.5	3	UP
				a
4 x 24 Single Bullnose	6 x 12 Cove Base (Universal, Flat Top)	0 11 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	6 x 8 Cove Base Corner Right (Flat Top)	se

Recommended Use


Empire is recommended for interior floors, walls, countertops, and exterior walls. Empire is not recommended for exterior horizontal surfaces or exterior paving. The polished finish is not recommended for wet areas where standing water may occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Wet Area Use for Mosaic

See Tile Performance Data chart.


Example Sizes (Available in all colors)



24 x 24



12 x 24



12 x 12 2 X 2 Mosaic Mounted to a 297 x297 sheet - UP only











Wet DCOF

(UP) **0.42 - 0.52** (PO) **0.22 - 0.32**









FAM01 Crème UPS/SPO

FAM02 Taupe UPS/SPO









FAM03 Sand UPS/SPO

FAM04 Mahogany UPS/SPO





FAM05 Iron UPS/SPO

Sizes & Finishes (Available in all colors)

EI	EL	n	THE	Е.

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
12 x 24	11-13/16 x 23-13/16	3/8	3/16	UPS/SPO

All field tile is calibrated (non-rectified).

Crossville recommends a minimum 3/16" grout joint.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	11-15/16 x 11-15/16	3/8	3	UPS

 $^{^{\}ast}$ Mounted on 12 x 12 sheet with 3mm grout joints.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	3/16	UPS/SPO
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS



6 x 12 Cove Base



Recommended Use

Familiar Territory is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Familiar Territory is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



12 x 24



2 x 2 Square Mosaic UPS Finish (Mounted on a 12 x 12 sheet.)

Wet Area Use for Mosaic













Wet DCOF (UPS) 0.50 - 0.60 (SPO) 0.42 - 0.52









Colonnade

Belvedere

Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
6 x 6	5-13/16 x 5-13/16	3/8	3/16	TX
6 x 12	5-13/16 x 11-13/16	3/8	3/16	TX
12 x 12	11-13/16 x 11-13/16	3/8	3/16	TX
12 x 24	11-15/16 x 23-7/8	3/8	3/16	TX

All field tile is calibrated (non-rectified).

Crossville recommends a minimum 3/16" grout joint.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
3 x 12 Single Bullnose	2-15/16 x 11-13/16	3/8	3/16	TX



3 x 12 Single Bullnose

ITEM CODES

Color Names:	Belvedere	Arboretum	Colonnade
6 x 6	8633/F856	F857	F858
6 x 12	8619/E848	E849	E850
12 x 12	8622	8623	8624
12 x 24	8636/E852	E853	E854
Bullnose	8645	8646	8647

Recommended Use


Garden with its heavily textured surface is specifically recommended for exterior floors, walls, and interior transitional spaces in commercial and residential applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed exterior installation tips.

Example Sizes (Field tile available in all colors)



12 x 24



6 x 6





Wet DCOF (TX) **0.50 - 0.60**





AV321 Lamp Post



AV323 Clock Tower



AV325 Dockside



AV322 Penthouse



AV324 Mainline



AV326 Pavement

Sizes & Finishes (Available in all colors)

FI	EL	D	TI	LE

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
2 x 6	1-13/16 x 5-13/16	3/8	3/16	UPS
12 x 24	11-13/16 x 23-13/16	3/8	3/16	UPS
All field tile is calibrated (non-	rectified).			
Crossville recommends a minimum 3/16" grout joint.				

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	3/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS



6 x 12 Cove Base



4 x 24 Single Bullnose

Recommended Use

Gotham is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Gotham is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)

12 x 24

2 x 6

greater than 33%.













Wet DCOF (UPS) **0.50 - 0.60**



Java Joint

- Competitvely priced for exceptional value
- Complete trim package including mosaic suitable for shower floo
- Cross-Sheen finish for easy cleaning
- Field Tile Calibrated
- Recommended grout joint: 3/16"

Visit the website to learn more: Crossvilleinc.com/Products/Java-Joint





JAV01 Two Sugars



JAV03 House Blend



JAV02 Flat White



JAV04 Fresh Ground



JAV05 French Press

Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
12 x 24	11-13/16 x 23-13/16	3/8	3/16	UPS

All field tile is calibrated (non-rectified). Crossville recommends a minimum 3/16" grout joint.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
2 x 2 Mosaic*	11-3/4 x 11-3/4	3/8	3/16	UPS
* Mounted on 11-3/4 x 11-3/4 sheets.				

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	3/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS



6 x 12 Cove Base (Universal, flat top)



4 x 24 Single Bullnose

Recommended Use


Java Joint is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Java Joint is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



12 x 24



2 x 2 Mosaic*

Wet Area Use for Mosaic













Wet DCOF (UPS) **0.42 - 0.52**

Jazz AgeTM

- The look of aged hardwood with authentic, timeworn patina
- Coordinating trim and mosaic for fully-furnished style
- Field Tile Rectifie
- Recommended grout joint: 3mm

Visit the website to learn more: Crossvilleinc.com/Products/Jazz-Age



Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
8 x 48	197 x 1196	10	3	UP
All field tile is rectified. Crossville recommends a minimum 3mm grout joint.				

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2*	299 x 299	10	3	UP
Herringbone**	295 x 341	10	3	UP

 $^{^{*}}$ Mounted on 12 x 12 sheet with 4.3mm grout joints.

COORDINATING TRIM (Available in all colors)

COOKDINATING TRIM (Available III all Colors)					
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish	
4 x 24 Single Bullnose	97 x 597	10	3	UP	
6 x 12 Cove Base	147 x 297	9.5	3	UPS†	
† Manufactured in the USA					






Recommended Use

Jazz Age is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Jazz Age is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



8 x 48

Wet Area Use for Mosaic







Wet DCOF (UP) 0.42 - 0.52

^{**} Mounted on 12 x 15 sheet with 2.5mm grout joints.





AV211 Cinema Champagne



AV214 Gallery Grey



AV212 Cafè Caramel



AV215 Boutique Black



AV213 Bistro Brown

Sizes & Finishes (Available in all colors)

_	_		71	 •
г.		u.	- 11	

Nominal (in)	Actual (in)	Thickness (in)	Thickness (in)	Finish	
6 x 6†	5-13/16 x 5-13/16	3/8	3/16	UPS	
6 x 18†	5-13/16 x 17-13/16	3/8	3/16	UPS	
12 x 12	11-13/16 x 11-13/16	3/8	3/16	UPS	
18 x 18	17-13/16 x 17-13/16	3/8	3/16	UPS	

[†] The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule.

All field tile is calibrated (non-rectified). Crossville recommends a a minimum 3/16" grout joint.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Thickness (in)	Finish
2 x 2 Mosaic*	11-13/16 x 11-13/16	3/8	3/16	UPS

^{* 2} x 2 mosaic tile mounted on 11-13/16 x 11-13/16 sheets.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Thickness (in)	Finish	
4 x 12 Single Bullnose	3-3/4 x 11-3/4	3/8	3/16	UPS	
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS	



6 x 12 Cove Base (Universal, flat top)




Recommended Use

Main Street is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Main Street is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)

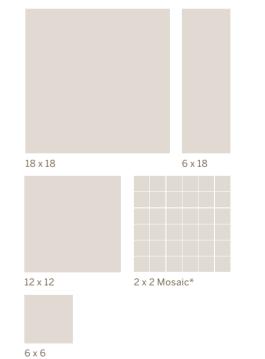

Wet Area Use for Mosaic













Wet DCOF (UPS) **0.58 - 0.68**





AV301 Juno UPS/HON



AV302 Luna UPS/HON



AV303 Kosmos UPS/HON



AV304 Gemini UPS/HON



AV305 Apollo UPS/HON

Sizes & Finishes (Available in all colors)

EI	EL	n	THE	Е.

TILLD TILL				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	10.5	3	UPS/HON
18 x 36	447 x 897	10.5	3	UPS/HON

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	96 x 597	10.5	3	UPS/HON



4 x 24 Single Bullnose

Recommended Use

Moonstruck is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Moonstruck is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



18 x 36



12 x 24













Wet DCOF (UPS) **0.50 - 0.60** (HON) **0.42 - 0.52**

	Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2" Square*	2 x 2	47.5 x 47.5	6	2.6	Gloss/Matte
2" Hex**	2 x 2	47.5 x 47.5	6	2.6	Gloss/Matte
3/4" Penny Round***	0.75 (diameter)	19 (diameter)	6	2.0	Gloss/Matte

- * 2" Square is mounted on a 301 x 301 sheet.
- ** 2" Hex is mounted on a 272 x 326 sheet.
- *** 3/4" Penny Round is mounted on a 292 x 324 sheet.
- † 2" Hex tile measures 47.5mm from one straight edge to the opposing parallel edge.


Recommended Use*

Multiplier tile is recommended for Interior Floors Dry, Interior Walls Dry, Interior Walls Wet, Exterior Walls, Exterior Covered Walls, Pool/Fountain Lining, Waterline Pool/Fountain, Countertops in residential and commercial applications.

* The tile applications featured in this publication are for illustration purposes only and are not intended as a representation or warranty of the suitability of Crossville Tile for any particular application. Specifically, tile selection for wet applications (such as shower or bathroom floors) requires careful consideration of the unique nature of the design and installation. For instance, the industry standard for tile used on level interior surfaces is a dynamic coefficient of friction (DCOF) value of 0.42 or greater; however, the use of small (2" or less) mosaics with lower DCOF values may nonetheless be acceptable for projects with an increased number of grout joints, along with the presence of other surface structures that provide both traction and a means for water to drain and dissipate from the area. It is the sole responsibility of each end user to consult with a design professional to determine and select the most suitable flooring for a particular project.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes





2" Square Mosaic

3/4" Penny Round Mosaic



2" Hex Mosaic




Shower Wall: **Multiplier** | MTPO2 Grey 2" Square Gloss Shower Floor: **Multiplier** | MTPO2 Grey 3/4" Penny Round Bathroom Floor: **Multiplier** | MTPO2 Grey 2" Hex Matte





Wet DCOF
Gloss <0.42
Matte <0.42








MTP01 White 3/4" Penny Round Gloss

MTP01 White 2" Hex Gloss









MTP02 Grey 2" Square Gloss

MTP02 Grey 3/4" Penny Round Gloss

MTP02 Grey 2" Hex Gloss









MTP03 Dark Grey 2" Square Gloss

MTP03 Dark Grey 3/4" Penny Round Gloss

MTP03 Dark Grey 2" Hex Gloss



MTP01 White 2" Square Matte




MTP01 White 3/4" Penny Round Matte



MTP01 White 2" Hex Matte



MTP02 Grey 2" Square Matte




MTP02 Grey 3/4" Penny Round Matte



MTP02 Grey 2" Hex Matte



MTP03 Dark Grey 2" Square Matte



MTP03 Dark Grey 3/4" Penny Round Matte



MTP03 Dark Grey 2" Hex Matte



Oak



AV351 Levity Oak



AV353 Blissful Oak



AV355 Peaceful Oak



AV357 Meditative Oak



AV352 Joyous Oak



AV354 Mindful Oak



AV356 Slumber Oak





AV361 Levity Olive



AV363 Blissful Olive



AV365 Peaceful Olive



AV367 Meditative Olive



AV362 Joyous Olive



AV364 Mindful Olive



AV366 Slumber Olive













Wet DCOF (UPS) **0.42 - 0.52**



NBC01 - Levity in Oak and Olive



NBC02 - Joyous in Oak and Olive



NBC03 - Blissful in Oak and Olive



NBC04 - Mindful in Oak and Olive



NBC05 - Peaceful in Oak and Olive



NBC06 - Slumber in Oak and Olive



NBC07 - Meditative in Oak and Olive



NBC08 - Levity, Blissful, and Mindful in Olive

FIELD TILE

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
x 15	72 x 372	10.5	3	UPS
x 36	147 x 897	10.5	3	UPS
x 36	197 x 897	10.5	3	UPS

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
1 x 6 Mosaic*	297 x 297	10.5	3	UPS
×1 6		13.3.3		

 $^{^{*}\,1\,}x$ 6 mosaic mounted on 297 x 297 sheets with a 3mm grout joint.

COORDINATING TRIM


Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	3	UPS
6 x 12 Cove Base (Olive only)	150 x 297	9.5		UPS
6 x 18 Single Bullnose	6 x 12 Cove	Base		

Recommended Use

Nest is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Nest is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)





Notorious®

- Coordinates with Nest and Crossville Porcelain Countertops for additional design opportunities
- Complete trim package including mosaic suitable for shower floor
- Field Tile Rectifie
- Recommended grout joint: 3mm
- Cross-Sheen finish for easy cleaning
- Get Planked available

Visit the website to learn more: CrossvilleInc.com/Products/Notorious 41. #11



NTR01 Femme Fatale UPS/HON *



NTR02 Private Eye UPS/HON



NTR03 Sugar Daddy UPS/HON



NTR04 Suspense UPS/HON *



NTR05 Leading Man UPS/HON



NTR06 Film Noir UPS/HON *

* Coordinates with Crossville Porcelain Slabs Sizes

& Finishes (Available in all colors)

Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
72 x 372	10.5	3	UPS
297 x 297	10.5	3	UPS/HON
297 x 597	10.5	3	UPS/HON
597 x 597	10.5	3	UPS/HON
597 x 897	10.5	3	UPS/HON
	72 x 372 297 x 297 297 x 597 597 x 597	72 x 372 10.5 297 x 297 10.5 297 x 597 10.5 597 x 597 10.5	72 x 372 10.5 3 297 x 297 10.5 3 297 x 597 10.5 3 597 x 597 10.5 3

All field tile is rectified. Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
Mixed Mosaic*	297 x 297	10.5	3	UPS
* Mixed Mosaic mounted on 297 x 2	97 sheet			

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 12 Single Bullnose	97 x 297	10.5	3	UPS/HON**
6 x 12 Cove Base	150 x 297	9.5	3	UPS

^{**} HON finish is special order only.



6 x 12 Cove Base (Universal, flat top)



4 x 12 Single Bullnose

Recommended Use


Notorious is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Notorious is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



24 x 36



24 x 24



3 x 15











Wet DCOF (UPS) **0.50 - 0.60** (HON) **0.42 - 0.52**

comprised of

1 x 4 and 2 x 4 tiles



Physics

- Competitively priced for exceptional value
- Coordinates with Retro Active 2.0 and Alaska
- Complete trim package including mosaic suitable for shower floor
- Field Tile Calibrated
- Cross-Sheen finish for easy cleaning

CrossvilleInc.com/Products/Physics





PHY01 Boson UPS/PO



PHY05 Quark UPS/PO

PHY03 Proton UPS/PO

PHY04 Graviton UPS/PO

Sizes & Finishes (Available in all colors)

ΕI	FΙ	TI	LE.

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
12 x 12	11-3/4 x 11-3/4	5/16	3/16	UPS/PO
12 x 24	11-3/4 x 23-3/4	5/16	3/16	UPS/PO

All field tile is calibrated (non-rectified). rossville recommends a minimum 3/16" grout joint.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
3 x 3 Mosaic*	11-3/4 x 11-3/4	1/4	3/16	UPS
* 3 x 3 Mosaic mounted on 12 x 12 s	heet.			

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	3/16	UPS/PO
6 x 12 Cove Base	5-7/8 x 11-3/4	5/16	3/16	UPS
1 x 6 Inside Corner	1 x 5-7/8	5/16	3/16	UPS
1 x 6 Outside Corner	1 x 5-7/8	5/16	3/16	UPS



6 x 12 Cove Base (Universal, flat top)



4 x 12 Single Bullnose



1 x 6 Inside & Outside Corners

Example Sizes (Field tile available in all colors)



12 x 24



12 x 12



12 x 12

Recommended Use

Physics is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.













Wet DCOF (UPS) **0.50 - 0.60** (PO) **0.31 - 0.41**





PTG01 Velho White



PTG02 Grand Rosé




PTG03 Venho Verde



PTG04 Tinta Negra



PTG05 Harvest Tawny



PTG06 Madiera Reserve

Available Colors



PTG01.10202UMOS Velho White 2 x 2 Mosaic



PTG02.10202UMOS Grand Rosé 2 x 2 Mosaic



PTG03.10202UMOS Venho Verde 2 x 2 Mosaic



PTG01.1CRSUMOS Velho White Crossville Mosaic†



PTG02.1CRSUMOS Grand Rosé Crossville Mosaic†



PTG03.1CRSUMOS Venho Verde Crossville Mosaic†



PTG05.10202UMOS Harvest Tawny 2 x 2 Mosaic



PTG06.10202UMOS Madiera Reserve 2 x 2 Mosaic



PTG04.1CRSUMOS Tinta Negra Crossville Mosaic†

PTG04.10202UMOS Tinta Negra


2 x 2 Mosaic



PTG05.1CRSUMOS Harvest Tawny Crossville Mosaic†



PTG06.1CRSUMOS Madiera Reserve Crossville Mosaic†

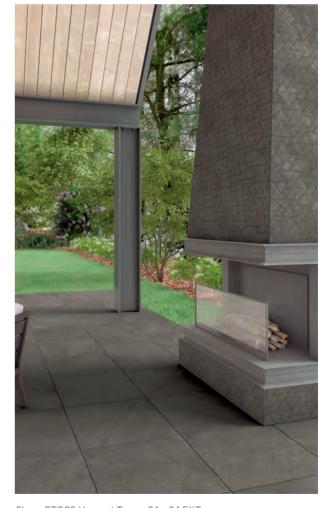

Floor: PTG05 Harvest Tawny 24 x 24 EXT Wall: PTG05 Harvest Tawny Crossville Mosaic UPS













Wet DCOF (UPS) **0.50 - 0.60** (EXT) 0.60 - 0.70



Sizes & Finishes (Available in all colors)

F	ΙE	LD	TI	LE

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm	n) Finish	
6 x 24 [†]	147 x 597	10.5	3	UPS	
12 x 24 [†]	297 x 597	10.5	3	UPS/EXT	
24 x 24	597 x 597	10.5	3	UPS/EXT	
24 x 48	597 x 1197	10.5	3	UPS	

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

 \dagger 6 x 24 and 12 x 24 EXT have extended lead time.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	298 x 298	10.5	3	UPS
Crossville Mosaic†	217 x 372	10.5	3	UPS

^{*} Mounted on 12 x 12 sheet with 3mm grout joints.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	96 x 597	10	3	UPS
6 x 12 Cove Base	150 x 297	9.5	3	UPS





Recommended Use


Portugal is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. Not recommended for exterior horizontal surfaces or exterior paving. **If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater**

See CrossvilleInc.com for detailed installation instructions.

Example Sizes



24 x 48







†Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.







Cools



AV312 Hand in Glove



AV314 Perfect Fit



AV316 Smarty Pants



AV317 Flannel Suit

Warms



AV311 Buttoned Up



AV313 Off the Cuff



AV315 Decked Out



AV318 Hats Off

Sizes & Finishes (Available in all colors)

FIELD	TILE

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
2 x 6	1-13/16 x 5-13/16	3/8	3/16	UPS
12 x 24	11-13/16 x 23-13/16	3/8	3/16	UPS

All field tile is calibrated.

Crossville recommends a minimum 3/16" grout joint.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	3/16	UPS



4 x 24 Single Bullnose

Recommended Use

Ready to Wear is recommended for interior walls and floors and exterior walls in both commercial and residential applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater

See CrossvilleInc.com for detailed installation instructions.





12 x 24















Wet DCOF (UPS) **0.50 - 0.60**

ReformationTM

- Complementary light and dark tones
- Block mosaic and traditional 2 x 2 mosaic available
- Coordinating trim available
- Field Tile Rectifie
- Recommended grout joint: 3mm
- Cross-Sheen finish for easy cleaning

Visit the website to learn more: CrossvilleInc.com/Products/Reformation





RFM01 New Day



RFM02 Rally Cry




RFM03 Ideology




RFM04 March On






Option 2



Option 3



Option 4



RFM01 Block Mosaic



RFM02 Block Mosaic



RFM03 Block Mosaic



RFM04 Block Mosaic



RFM012 x 2 Mosaic



RFM02 2 x 2 Mosaic



RFM03 2 x 2 Mosaic



RFM04 2 x 2 Mosaic











Wet DCOF (UPS) **0.42 - 0.52**



Sizes & Finishes (Available in all colors)

FIELD TILE

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 36	147 x 897	10.5	3	UPS
12 x 36	297 x 897	10.5	3	UPS
24 x 36	597 x 897	10.5	3	UPS

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	10.5	3	UPS
Block Mosaic*	297 x 297	10.5	3	UPS

^{* 2} x 2 Square Mosaic mounted on 12 x 12 sheet.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	3	UPS
6 x 12 Cove Base	150 x 297	9.5	3	UPS





6 x 12 Cove Base (Universal, Flat Top)


6 x 18 Single Bullnose

Recommended Use

Reformation is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. **If offset pattern is required for tiles 15 inches or longer, Crossville** recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)



24 x 36



12 x 36



6 x 36





Block Mosaic UPS Finish (Mounted on a 12 x 12 sheet)

2 x 2 Square Mosaic UPS Finish (Mounted on a 12 x 12 sheet)



^{*} Block Mosaic mounted on 12 x 12 sheet.









RLX01 Chiffon



RLX02 Nutmeg



RLX03 Woolen



RLX04 Caviar

Sizes & Finishes (Available in all colors)

Sizes & I IIIIsiles (Available III all colors)	
FIELD TILE	

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 36	147 x 897	9.3	3	UP

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	9.3	3	UP
* Mounted on 12 x 12 sheet with a 3mm	n grout joint.			

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 18 Bullnose	146 x 447	9.3	3	UP



6 x 18 Bullnose

Recommended Use

Relax is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. **If offset pattern is required for tiles 15 inches or longer, Crossville** recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.




RLX01 Chiffon Mosaic



RLX02 Nutmeg Mosaic





RLX04 Caviar Mosaic

Example Sizes (Field tile available in all colors)



6 x 36



2 x 2 Square Mosaic UP Finish (Mounted on a 12 x 12 sheet)







Wet DCOF (UP) **0.42 - 0.52**

Retro Active 2.0

- Coordinates with Alaska, Physics, and Retro Active 2.0 patterns
- Pattern texture for linear look
- Popular plank shapes, including 24" length
- Multiple sizes for design versatility
- Rounded edges allow for a smoother transition
- Ideal for minimalist looks
- Cross-Sheen finish for easy cleaning (UPS only)

Visit the website to learn more:


CrossvilleInc.com/Products/Retro-Active-2-0















RET07 Leaden UPS/PO/PTN

I RET08 Mercurial UPS/PO/PTN

I RET05 Snow Blind UPS/PO/PTN

I RET09 Phantom UPS/PO/PTN







RET10 Armor UPS/PO/PTN


II RET11 Gulf Breeze UPS/PO/PTN

II RET12 Racing Green UPS/PO/PTN



Price Groups

I Group II Group II

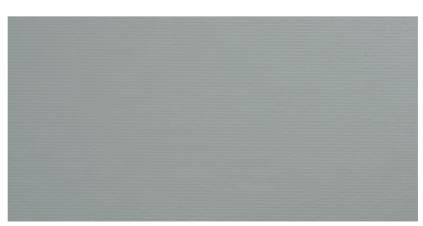

Pattern Example - RETO8 Mercurial PTN, Available in all colors











Wet DCOF (UPS) 0.50 - 0.60 (PO) 0.31 - 0.41 (PTN) 0.42 - 0.52



Sizes & Finishes (Available in all colors)

FIELD TILE				
Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
3 x 12*†	2-3/4 x 11-3/4	5/16	3/16	PO/UPS/PTN
4 x 12*†	3-3/4 x 11-3/4	5/16	3/16	PO/UPS/PTN
4 x 24*†	3-3/4 x 23-3/4	5/16	3/16	PO/UPS/PTN
6 x 12*†	5-3/4 x 11-3/4	5/16	3/16	PO/UPS/PTN
6 x 24*†	5-3/4 x 23-3/4	5/16	3/16	PO/UPS/PTN
12 x 12	11-3/4 x 11-3/4	5/16	3/16	PO/UPS/PTN
12 x 24	11-3/4 x 23-3/4	5/16	3/16	PO/UPS/PTN

- * Custom cut program. Allow 2-4 weeks based on availability for delivery.
- † The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. All field tile is calibrated (non-rectified).

Crossville recommends a minimum 3/16" grout joint.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
2 x 4 Mosaic*	11-3/4 x 11-3/4	5/16	3/16	UPS

^{* 2} x 4 Mosaic mounted on 12 x 12 sheet.

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	3/16	PO/UPS/PTN†
2 x 12 Cove Base	1-3/4 x 11-11/16	3/8	3/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS
2 x 2 Cove Base Inside Corner	1-3/4 x 1-3/4	3/8	3/16	UPS
1 x 6 Inside and Outside Corner	1 x 5-7/8	NA	3/16	UPS
2 x 4 Cove Base Outside Corner	1-3/4 x 3-1/2	3/8	3/16	UPS
		1		



(Universal, Flat Top)









Cove Base Corner Cove Base Corner Outside Corners



4 x 12 Single Bullnose 2 x 12 Cove Base (PO/UPS/PTN Special Order)


† Special Order

Recommended Use

Retro Active 2.0 is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)

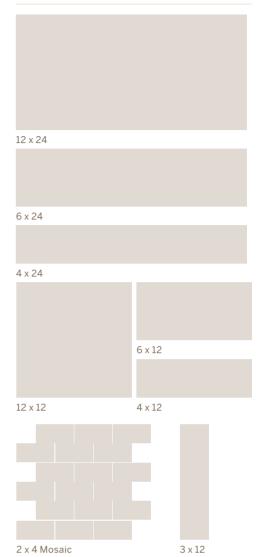













Mosaic blends available**
























SHD1/.10103SMOS Warm Grays - SPO (SHD43, SHD45, SHD47)




SHD2/.10103SMOS Cool Grays - SPO (SHD44, SHD46, SHD48)



SHD3/.10103SMOS Whites - SPO (SHD41, SHD42)



SHD4/.10103SMOS New Warms - SPO (SHD51, SHD52, SHD53)



SHD46.10202UMOS Available in all colors UP SHD46 Haze UPS shown













Wet DCOF (UPS) 0.50 - 0.60 (SPO) 0.42 - 0.52



Sizes & Finishes (Available in all colors)

FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 24	147 x 597	9.5	3	UPS/SPO
12 x 12 Triangle	297 x 297	9.5	3	UPS/SPO
12 x 24	297 x 597	9.5	3	UPS/SPO/PTN
24 x 24	597 x 597	9.5	3	UPS/SPO
24 x 48	597 x 897	10.5	3	UPS/SPO

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish	
1 x 3 Blended Mosaic*	297 x 297	9.5	3	SPO	
2 x 2 Solid Mosaic*	298 x 298	9.5	3	UPS	
* 1 x 3 Mosaic mounted on 11-7/8	x 11-7/8 sheets.				

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	96 x 597	9.5	3	UPS/SPO
6 x 12 Cove Base	150 x 297	9.5	3	UPS



6 x 12 Cove Base 4 x 24 Single Bullnose

SPO is a semi-polished fin sh.

Recommended Use


Shades 2.0 is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Shades 2.0 is not recommended for exterior horizontal surfaces or exterior paving. The SPO finish (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.


Wet Area Use for Mosaic

See Tile Performance Data chart.

Example Sizes




24 x 48





12 x 12 Triangle 2 x 2 Square Mosaic UPS Finish (Mounted on a 12 x 12 sheet)

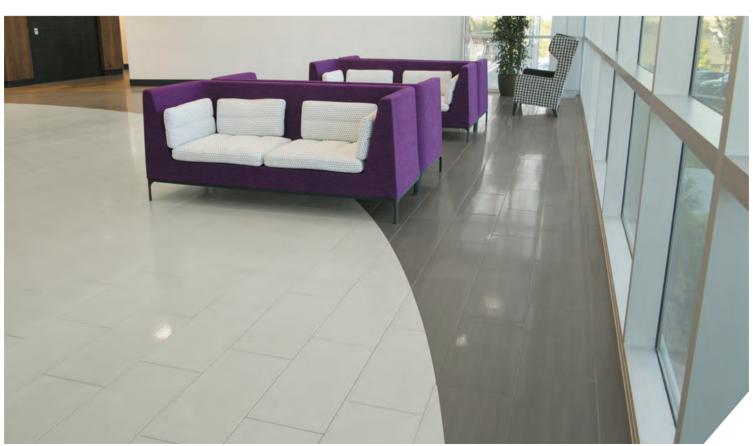









AV283 Sweet Georgia Brown





AV284 Silver Screen



AV285 Bank Roll

Sizes & Finishes (Available in all colors)

FΙ	EL	D	TI	LE	

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 36	147 x 897	10.5	3	UPS
8 x 36	197 x 897	10.5	3	UPS
12 x 36	297 x 897	10.5	3	UPS
AUG IIII I III				

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	3	UPS



6 x 18 Single Bullnose

Recommended Use

SpeakEasy is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. SpeakEasy is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all 5 colors)

12 x 36

8 x 36

6 x 36













Wet DCOF (UPS) **0.50 - 0.60**



State of Grace GRC01 UPS/SAT



12 x 15 Herringbone UPS Finish



2 x 2 Mosaic UPS Mesh mounted on a 298mm x 298mm sheet



3 x 3 Hex Mosaic UPS 296.1mm x 276.4mm sheet



6 x 12 Base Molding*



3 x 12 Crown Molding*



1-1/2 x 12 Chair Rail*



2-1/2 x 12 Left & Right Chevron



3 x 6 Picket

Sizes & Finishes

FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
3 x 6	72 x 147	10.5	3	UPS/SATIN
3 x 6 Picket	72 x 146	10.5	3	UPS/SATIN
6 x 24	147 x 597	10.5	3	UPS/SATIN
12 x 12	297 x 297	10.5	3	UPS/SATIN
12 x 24	297 x 597	10.5	3	UPS/SATIN
24 x 24	597 x 597	10.5	3	UPS/SATIN
24 x 48	597 x 1197	10.5	3	UPS
2-1/2 x 12 Chevron All field tile is rectified. Crossville recommends a minimun	64 x 305 a 3mm grout joint.	10.5	3	UPS/SATIN

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Square*	47 x 47	10.5	3	UPS
3 x 3 Hex**	77 x 88	10.5	3	UPS
12 x 15 Herringbone***	33 x 98	10.5	3	UPS

- * Mosaic mounted on 298 x 298 sheets with a 3mm grout joint. Coverage area 0.97 SF per sheet.
 ** Mosaic Mounted on 296.1×276.4 sheets with a 3.5mm grout joint. Coverage area 0.71 SF per sheet.
 *** Mosaic mounted on 306.1×371.6 sheets with a 2.5mm grout joing. Coverage area 0.93 SF per sheet.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
1-1/2 x 12 Chair Rail †	30 x 297	9.5	3	SATIN
3 x 12 Crown Molding †	75 x 297	9.5	3	SATIN
6 x 12 Base Molding †	150 x 297	9.5	3	SATIN
4 x 24 Bullnose	96 x 597	10.5	3	UPS/SATIN
2 x 12 Cove Base	45 x 297	9.5	3	UPS
		3.6		0. 0

Example Sizes



24 x 48





12 x 12

2-1/2 x 12 Left &

Right Chevron



3 x 6 Picket



2 x 12 Cove Base

 $\dagger \, \textit{Globally Sourced - Hydrotect} \, {}^{\text{m}} \, \textit{not available}$

State of Grace UPS is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. The satin finish is recommended for residential and light commercial use only. State of Grace is not recommended for exterior horizontal surfaces or exterior paving. The satin finish is not recommended for wet areas where standing water may occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.













Wet DCOF (UPS) **0.42 - 0.52** (SAT) 0.31 - 0.41



^{*} Globally Sourced - Hydrotect™not available

Story TellerTM

- Four colorways, each with a light and dark version
- Versatile 6 x 48 planks with 6 x 24 bullnose and 6 x 12 cove base
- Field Tile Rectifie
- Mosaic options: A traditional 2 x 2 and a 1 x 6 brick pattern
- French-inspired cerused style, made in the USA
- Recommended grout joint: 3mm

Visit the website to learn more: CrossvilleInc.com/Products/Story-Teller

6 x 48



STY01 Satiric



STY02 Serious



STY03 Falsity



STY04 Fact



STY05 Villain



STY06 Hero



STY07 Evil



STY08 Good

2 x 2 Mosaics





STY02 Serious



STY03 Falsity



STY04 Fact



STY05 Villain



STY06 Hero



STY07 Evil



STY08 Good

1 x 6 Brick Mosaics



STY01 Satiric













STY02 Serious STY03 Falsity STY04 Fact STY05 Villain STY06 Hero STY07 Evil











SHADE &

Wet DCOF (UPS) **0.42 - 0.52**



Sizes & Finishes (Available in all colors)

FIELD TILE							
Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish			
6 x 48	147 x 1197	10.5	3	UPS			

All field tile is rectified.

Crossville recommends a minimum 3mm grout joint.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	299 x 299	10.5	2.5	UPS
1 x 6 Brick Mosaic**	297 x 372	10.5	3	UPS

 $^{^{*}}$ Mounted on 12 x 12 sheet with 2.5mm grout joints.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 24 Single Bullnose	147 x 597	10.5	3	UPS
6 x 12 Cove Base	150 x 297	9.5	3	UPS





6 x 12 Cove Base

6 x 24 Single Bullnose

Recommended Use

Story Teller is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)



6 x 48





2 x 2 Mosaic (Mounted on a 298 x 298 sheet)

2 x 2 Brick Mosaic (Mounted on a 297 x 392 sheet)



^{**} Mounted on a 13 x 15 sheet with 3mm grout joint.








Natural Stone





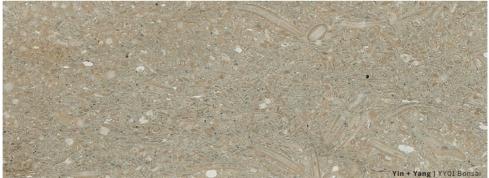

YIN + YANG





Yin + Yang

- Natural stone tile in modular, mosaic shapes and sizes
- Well-balanced stone shades to harmonize with decor
- Versatile options for interior walls, fl ors and outdoor vertical surfaces
- Select Yin+Yang coordinates with Ebb & Flow

Visit the website to learn more:

CrossvilleInc.com/Products/Yin-Yang





YY04 Black Dragon + (polished finish



YY07 Moon Gate + (natural finish



YY03 Snow Flower + (polished finish



YY05 Koi Pond (natural finish



YY01 Bonsai + (natural finish



YY06 Lotus Blossom (natural finish



YY02 Silk Fan



YY08 Tea Garden (polished finish

Sizes & Finishes (Available in all colors)

FIELD TILE Nominal (in) Nominal (in) Actual (mm) Thickness (mm) 1 x 3 Herringbone* 13 x 13 332.21 x 332.21 10 1-1/2 x 6-1/2 Brick** 1-1/2 x 6-1/2 41 x 170 10 1/2 x 1/2 Mosaic* 12 x 12 299 x 299 10 1 x 3 Elongated Hex* 8-3/4 x 11-1/2 223.52 x 294 10 299 x 299 10 1/2 x 1-1/2 Stacked Mosaic* 12 x 12 3 x 12 Plank** 84 x 299 10 3 x 12 Linear Mosaic*** 11-1/2 x 11-3/4 298 x 295 10

Recommended Use

Yin + Yang natural stone is recommended for interior and exterior walls. It is recommended for dry interior floors. Yin + Yang is not suitable for the lining of pools, fountains, or spas. This natural stone displays a wide variation in colors. Please refer to CrossvilleInc.com for photos. Always work from at least four cartons to ensure optimum installation.


Care and Maintenance

For complete care and maintenance information of stone products, the Marble Institute of America provides extensive information on their website, marbleinstitute.com/ consumers/care.cfm.

Phone (440) 250-9222.

^{*} Mesh mounted ** Sold as loose pieces

^{***} Linear Mosaic consists of 15 x 98, 23 x 148, and 38 x 148 tiles



YY04/.1.5.5MOS Mosaic 1/2 x 1/2



YY04/.10103HEX Elongated Hex 1 x 3



YY04/.10103HB Herringbone 1 x 3




YY04/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2





YY04/.10312PLK Plank 3 x 12 **

Snow Flower - Coordinates with Ebb & Flow EF01 Snow and Ice and EF06 Wind and Rain



YY03/.1.5.5MOS Mosaic 1/2 x 1/2



Brick 1-1/2 x 6-1/2 **

YY03/.10103HEX Elongated Hex 1 x 3



YY03/.10103HB Herringbone 1 x 3



YY03/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



Linear Mosaic



YY03/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY03/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.

Koi Pond



YY05/.1.5.5MOS Mosaic 1/2 x 1/2



YY05/.10103HEX Elongated Hex 1 x 3



YY05/.10103HB Herringbone 1 x 3



YY05/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY05/.1MIXMOS Linear Mosaic




YY05/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY05/.10312PLK Plank 3 x 12 **

Koi Pond displays a wide variation in colors. Please refer to CrossvilleInc.com for photos. Always work from at least four cartons to ensure optimum installation.

Moon Gate - Coordinates with Ebb & Flow EF04 Sand and Surf



YY07/.1.5.5MOS Mosaic 1/2 x 1/2



YY07/.10103HEX Elongated Hex 1 x 3



YY07/.10103HB Herringbone 1 x 3



YY07/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY07/.1MIXMOS Linear Mosaic



YY07/.11.56.5BR Brick 1-1/2 x 6-1/2 **




YY07/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.

Bonsai - Coordinates with Ebb & Flow EF03 Flora and Fauna



YY01/.1.5.5MOS Mosaic 1/2 x 1/2



YY01/.10103HEX Elongated Hex 1 x 3



YY01/.10103HB Herringbone 1 x 3



YY01/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY01/.1MIXMOS Linear Mosaic



YY01/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY01/.10312PLK Plank 3 x 12 **

Silk Fan



YY02/.1.5.5MOS Mosaic 1/2 x 1/2



YY02/.10103HEX Elongated Hex 1 x 3



YY02/.10103HB Herringbone 1 x 3



YY02/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY02/.1MIXMOS Linear Mosaic



YY02/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY02/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.

Lotus Blossom



YY06/.1.5.5MOS Mosaic 1/2 x 1/2



YY06/.10103HEX Elongated Hex 1 x 3



YY06/.10103HB Herringbone 1 x 3



YY06/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY06/.1MIXMOS Linear Mosaic



YY06/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY06/.10312PLK Plank 3 x 12 **

 $Lotus\ Blossom\ displays\ a\ wide\ variation\ in\ colors.\ Please\ refer\ to\ CrossvilleInc.com\ for\ photos\ Always\ work\ from\ at\ least\ four\ cartons\ to\ ensure\ optimum\ installation.$

Tea Garden



YY08/.1.5.5MOS Mosaic 1/2 x 1/2



YY08/.10103HEX Elongated Hex 1 x 3



YY08/.10103HB Herringbone 1 x 3



YY08/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY08/.1MIXMOS Linear Mosaic



YY08/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY08/.10312PLK Plank 3 x 12 **


^{**} Sold as loose pieces Shown in multiple pieces to show variation

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.



Glass Tile














CONVERGENCE
EBB & FLOW
GLASS BLOX®
GROOVE GLASS
SIDEVIEW GLASS

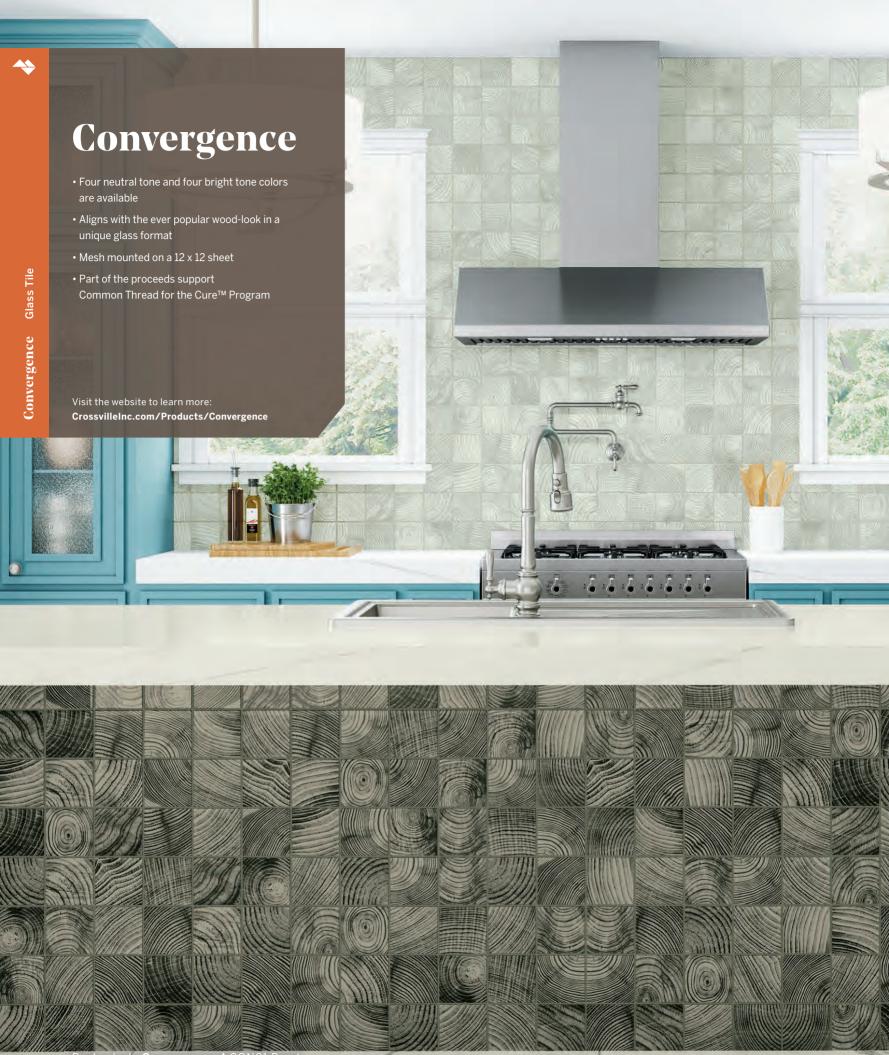

Colors - Neutrals







CON02 Chardonnay



CON03 Sepia




CON04 Pigeon


Colors - Brights




CON05 Orchid



CON06 Indigo



CON07 Currant



CON08 Peacock

Sizes & Finishes (Available in all colors)

FI	EL	D	TI	LE

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 4 Mosaic*	298 x 298	6	PO

Mosaic mounted on 298 x 298 sheet.

Recommended Use

Convergence is recommended for interior walls in wet or dry locations.







1/2 x 1/2 Mosaic

Linear Mosaic

1/2 x 1/2 Mosaic

1/2 x 3 Stacked Mosaic

Linear Mosaic



EF01/.1.5.5MOS



EF01/.1.503MOS



EF01/.1MIXMOS



EF06/.1.5.5MOS



EF06/.1.503MOS



EF06/.1MIXMOS



EF02/.1.5.5MOS



EF02/.1.503MOS





EF07 Sticks and Stones



EF07/.1.5.5MOS



EF07/.1.503MOS



EF07/.1MIXMOS

EF03 Flora and Fauna*



EF03/.1.5.5MOS*




EF03/.1.503MOS



EF03/.1MIXMOS

EF08 Dusk and Dawn



EF08/.1.5.5MOS



EF08/.1.503MOS



EF08/.1MIXMOS

EF04 Sand and Surf*



EF04/.1.5.5MOS



EF04/.1.503MOS





EF04/.1MIXMOS



EF05 Rocks and Minerals

THE ST


EF05/.1.5.5MOS

EF05/.1MIXMOS

EF09 Cinders and Smoke*



EF09/.1.5.5MOS



EF09/.1.503MOS



EF09/.1MIXMOS

*Coordinates with Crossville Yin+Yang Natural Stone tile.

FIELD TILE Nominal (in) Actual (in) Thickness (in) 1/2 x 1/2 Mosaic* 9/16 x 9/16 1/4 1/2 x 3 Stacked Mosaic* 9/16 x 2-7/8 1/4 Linear Mosaic** 1/4 1/2 x 2 9/16 x 1-7/8 1/2 x 4 9/16 x 3-7/8 1/4 1/2 x 6 9/16 x 5-7/8 1/4

1/8 inch grout joint on all mosaic sheets.

* Actual size of mounted sheet is 11-3/4 x 11-3/4

Sizes & Finishes (Available in all colors)

** Actual size of mounted sheet is 11-3/4 x 13

Recommended Use

Crossville's Ebb & Flow mosaic can be used for interior walls and covered exterior wall applications. In wall applications exposed to regular moisture (such as shower walls) the application of a penetrating sealer, such as Miracle 511 Impregnator, is required.

See detailed installation instructions at CrossvilleInc.com.





Glass Blox®

- 44 colors in groupings of three shades
- Solid colors available in 1 x 1, 1/2 x 6, 2 x 4, 4 x 4 and select colors in 1/2 x 2
- Blended colors are available in 1 x 1 and 1/2 x 2
- Custom blends are available upon request
- Part of the proceeds support
 Common Thread for the Cure™ Program

Visit the website to learn more:


CrossvilleInc.com/Products/Glass-Blox

regal premium experience

RPX: Insur


Bright Solids (1 x 1 mounted on 12 x 12 sheets)



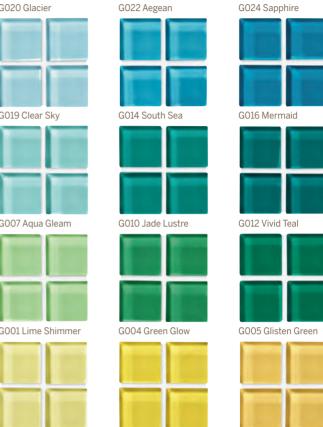

G065 Citrine

Neutral Solids (1 x 1 mounted on 12 x 12 sheets)

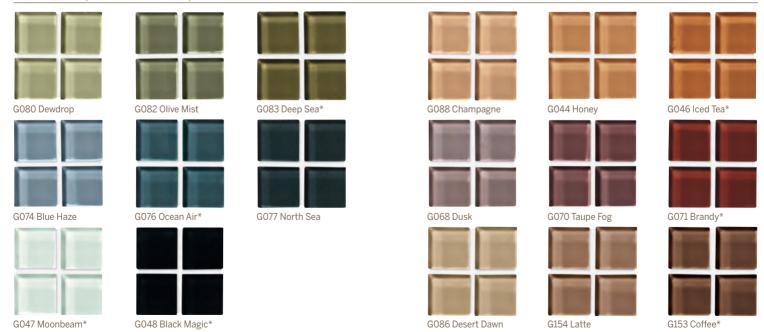

G062 Lemon Zest






G066 Sunshine






Blends (1 x 1 mounted on 12 x 12 sheets)







GB06 Angel Fish/South Sea/ Glacier




GB02 Orange Sizzle/Flame/ Dazzle Red




GB07 South Sea/Aegean/ Blue Grotto




GB04 Moonbeam/Lemon Zest/Lime Shimmer




GB08 Mermaid/Vivid Teal/ Sapphire




GB05 Moonbeam/Clear Sky/ Aqua Gleam



GB09 Sapphire/Mermaid/ Aegean




GB03 Angel Fish/Blue Grotto/ Purple Zing



GB01 Moonbeam/Black Magic

Blends (1/2 x 2 mounted on 12 x 12 sheets)



GB11 Blue Haze/Ocean Air/ North Sea



GB12 Dewdrop/Olive Mist/ Deep Sea




GB13 Dusk/Taupe Fog/ Brandy



GB14 Champagne/Honey/ Iced Tea


Example Sizes (Field tile available in all colors)



1 x 1 mounted 12 x 12 sheets (Available in all 44 colors)

5)						
	1 (0	_		0 1		

1/2 x 2 mounted 12 x 12 sheets (Available in G046, G047, G048, G071, G076, G083, and G153 only)



2 x 4 mounted 12 x 12 sheets (Available in all 44 colors)

4 x 4 (Available in all 44 colors)		
	 le in all 4	4 colors)

Sizes & Finishes (Available in all colors)

FIELD TILE Description	Nominal (in)	Actual (in)	Thickness (in)
Solids	1 x 1*	7/8 x 7/8	1/4
	1/2 x 2*	3/8 x 1-7/8	1/4
	1/2 x 6	3/8 x 5-3/4	1/4
	2 x 4*	1-7/8 x 3-7/8	1/4
	4 x 4	3-7/8 x 3-7/8	1/4
Blends	1 x 1*	7/8 x 7/8	1/4
	1/2 x 2*	3/8 x 1-7/8	1/4

^{*}Actual size of mesh mounted sheets is 11-5/8 x 11-5/8.


Recommended Use

Glass Blox can be used for interior wall applications – wet or dry locations, and exterior covered wall applications. Note: Mosaic only are acceptable for pool waterlines.

Custom blends available in all sizes except 1/2 x 6 and 4 x 4.







GG20 Shimmy



GG21 Salsa



GG22 Disco



GG11 Jump Style



GG30 Rumba



GG31 Samba



GG32 Twist

Blends









GGB01 Swing GGB02 Jitterbug

Sizes & Finishes (Available in all colors)

FIELD TILE		
Description	Actual (mm)	Thickness (mm)
2 x 8	48 x 198	6
2 x 12	48 x 298	6
2 x 16	48 x 398	6
4 x 8	98 x 198	6
4 x 12	98 x 298	6
4 x 16	98 x 398	6
2 x 2 Blends*	48 x 48	6

^{*}Mounted on a 12 x 12 sheet.

Actual size of mounted sheet is 298 x 298 with a recommended 2mm grout joint.

Recommended Use

Groove Glass can be used for interior wall applications – wet or dry locations, and exterior covered wall applications.

Note: Mosaic only are acceptable for pool waterlines.

Example Sizes (Field tile available in all colors)

4 x 16		
2 x 16	4 x 8	2 x 8
4 x 12		
2 x 12		







SV03/.103031 Gold Polished Finish



SV03/.103032 Gold Matte Finish





SV04/.103032 Copper



SV01/.103031 Tungsten Polished Finish



SV01/.103032 Tungsten



SV02/.103031 Silver Polished Finish



SV02/.103032 Silver Matte Finish

Coordinating Trim Accent Bars (available in all colors)


Coordinating Trim Accent Bars (available in all colors)



SV03/.10312AB Gold 3 x 12 Accent Bar, Mixed Finish



SV04/.10312AB



Coordinating Trim Liner Bars (available in all colors)

SV03/.10106LB1 Gold 1-1/8 x 6 Liner Bar, Polished Finish



SV04/.10106LB1 Copper 1-1/8 x 6 Liner Bar, Polished Finish



SV01/.10312AB Tungsten 3 x 12 Accent Bar, Mixed Finish




SV02/.10312AB Silver 3 x 12 Accent Bar, Mixed Finish



SV03/.10106LB2 Gold 1-1/8 x 6 Liner Bar, Matte Finish



SV04/.10106LB2 Copper 1-1/8 x 6 Liner Bar, Matte Finish



3 x 3 Mosaic Matte or Polished Finish Mesh mounted on a 300mm x 300mm sheet Available in all colors.

SV01/.10106LB1 Tungsten 1-1/8 x 6 Liner Bar, Polished Finish

SV02/.10106LB1 Silver 1-1/8 x 6 Liner Bar, Polished Finish



SV01/.10106LB2 Tungsten 1-1/8 x 6 Liner Bar, Matte Finish



SV02/.10106LB2 Silver 1-1/8 x 6 Liner Bar, Matte Finish

Sizes & Finishes (Available in all colors)

FIELD TILE						
Nominal (in)	Nominal Piece (in)	Actual (mm)	Thickness (mm)	Finish		
12 x 12 Mosaic	3 x 3	300 x 300	8	Matte/Polished		
Mesh mounted on 30	0 x 300mm sheet.					

Coordinating Trim

Nominal (in)	Nominal Piece (in)	Actual (mm)	Thickness (mm)	Finish
3 x 12 Accent Bar*	1x3&2x3	75 x 300	8	Mixed
1-1/8 x 6 Liner Bar**	1-1/8 x 6	N/A	16	Matte/Polished

* Mesh mounted on a 75mm x 300mm sheet. Available in all colors.

^{**} Actual size 28mm x 150mm. Available in all colors and fin shes



1-1/8 x 6 Liner Bar with Profile

Recommended Use

Sideview Glass tile can be used for interior walls in wet or dry applications.

Cleaning

Regular cleaning is the best way to keep Sideview Glass tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville products is available at CrossvilleInc.com.







Swatches | BRI26 Spruce Gloss










COLOR BY NUMBERS® CURSIVE™ **HANDWRITTEN** SIMPATICO SWATCHES™

Color by Numbers®

- 16 picture perfect hues
- 6 glass listello options to add variety to design
- Coordinates with Simpatico

Visit the website to learn more: CrossvilleInc.com/Products/Color-By-Numbers




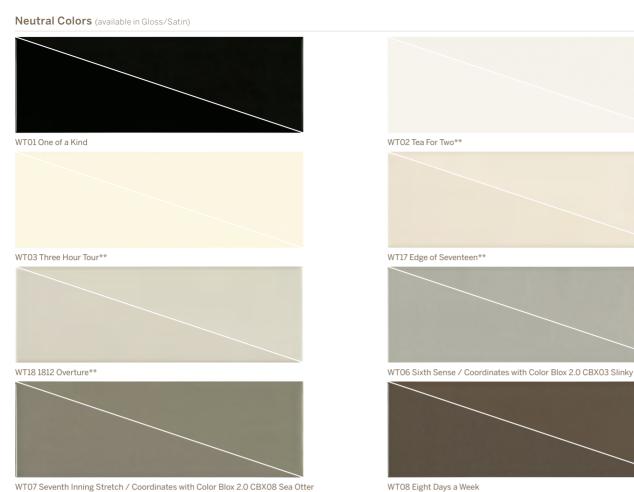





Brights (available in Gloss Only)

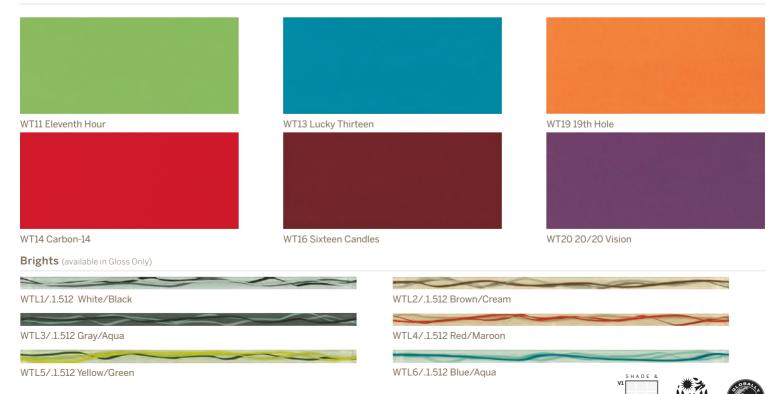

WT10 A Perfect Ten / Coordinates with Color Blox 2.0 CBX17 I See the Moon



Sizes & Finishes (Available in all colors)

FIELD TILE		
Nominal (in)	Actual (in)	Thickness (in)
4 x 8	3-15/16 x 7-7/8	1/4
4 x 12	3-15/16 x 11-13/16	1/4

Crossville recommends a minimum 1/16 grout joint. This tile is calibrated (non-rectified).

Color, Finishes, and Sizes

	F	inish			Cove Base	Single Bullnose
Color	Gloss	Satin	4 x 8	4 x 12	& Corners	& Corners
WTO1	~	~	~	~	~	~
WTO2	~	~	~	~	✓	✓
WTO3	~	~	~	~	~	~
WTO6	~	~	~	~	✓	✓
WTO7	~	~	~	~	~	~
WTO8	~	~	~	~	✓	✓
WTO9	~	~	~	~	~	~
WT10	~	~	~	~	✓	✓
WT11	~		~			
WT13	~		~			
WT14	~		~			
WT16	~		~			
WT17	~	~	~	~	~	✓
WT18	~	~	~	~	~	✓
WT19	~		~			
WT20	~		~			

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)
2 x 8 Single Bullnose	2 x 7-7/8	1/4
4 x 12 Single Bullnose	3-15/16 x 11-13/16	1/4
2 x 2 Bullnose Corner	2-3/16 x 2-3/16	1/4
4 x 4 Bullnose Corner	3-15/16 x 3-15/16	1/4
4 x 8 Cove Base*	3-15/16 x 7-7/8	1/4
4 x 8 Cove Base Corner Left & Right*	3-15/16 x 7-7/8	1/4
1/2 x 12 Listello	7/16 x 11-11/16	1/4

4 x 8 Cove Base	4 x 8 Cove Base Corner (Left & Right)	4 x 12 Single Bullnose	4 x 4 Bullnose Corner	2 x 8 Single Bullnose	2 x 2 Bullnose Corner

^{*} Cove Base has an unglazed flat top.


Example Sizes (Available in all colors)



4 x 8

Recommended Use

 $\label{thm:commended} \mbox{Color By Numbers tile is recommended for interior vertical surfaces in all residential and light commercial applications.}$

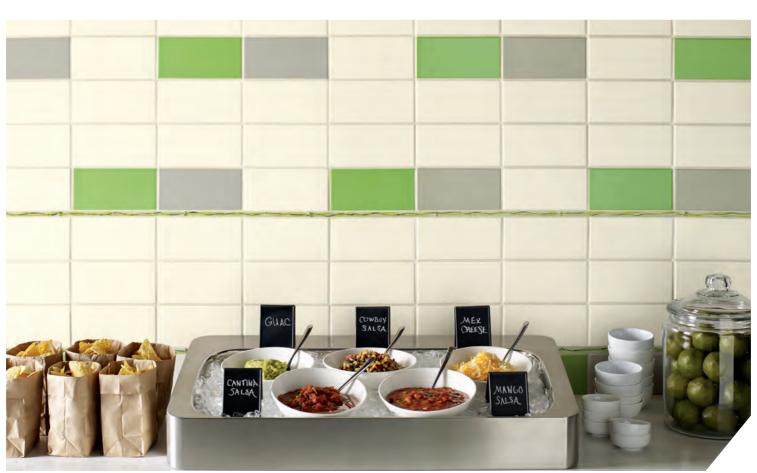



CursiveTM


- Nine trending colors
- Unique shapes to complete your design
- Hand crafted appearance
- Water color effect

Visit the website to learn more:

CrossvilleInc.com/Products/Cursive

CRV01 Ghost CRV02 Smoke CRV03 Charcoal CRV04 Soft Teal CRV04 Soft Teal CRV05 Old Denim CRV06 Iris CRV07 Rose Gold CRV07 Rose Gold CRV08 Goldenrod CRV09 Oxblood

⁴ x 4 Circle Demilune



4 Corner

2 Corner

3 x 6

1.5 x 6 Trim

Available Shapes

6 x 6

6 x 6 Triangle

3 x 12

Sizes & Finishes (Available in all colors)

FIELD TILE					
	Nominal Size (in)	Actual (in)	Thickness (in)	Finish	
3 x 6	3 x 6	3 x 6	3/8	Gloss	
3 x 12	3 x 12	3 x 12	3/8	Gloss	
6 x 6	6 x 6	6 x 6	3/8	Gloss	
Circle	4 x 4	4 x 4	3/8	Gloss	
Demilune	2 x 4	2 x 4	3/8	Gloss	
4-Corner	6 x 6	6 x 6	3/8	Gloss	
2-Corner	3 x 6	3 x 6	3/8	Gloss	
Triangle	6 x 6	6 x 6	3/8	Gloss	

Crossville recommends a minimum 1/8 inch - 1/4 inch grout joint. This tile is calibrated (non-rectified).

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)	Finish
1-1/2 x 6*	1-3/8 x 6	3/8	Gloss

 $^{^{\}ast}$ Has finished edges on one 6" and 1-1/2" side

Recommended Use

Cursive tile is recommended for interior vertical surfaces in residential and commercial applications.

* Each tile has a handmade appearance with a watercolor effect around the edges.

Cursive tiles are maufacturered to appear handmade. As such, actual installations will have an inherent, intentional variations that occur in size, thickness, faltness and color, as well as grout joint to grout joint.

^{*} Has finished edges on one 6" and 1-1/2" side





Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)**	Thickness (in)	Finish	
3 x 6	3/8	Gloss	
3 x 12	3/8	Gloss	
3 x 6 Picket	3/8	Gloss	
3 x 6 Gothic Picket	3/8	Gloss	
Crossville recommends an 1/8 in	ich - 1/4 inch grout		

MOSAICS

Nominal (in)**	Thickness (in)	Finish	
Diamond Mosaic*	3/8	Gloss	
Leaf Mosaic*	3/8	Gloss	
*Mosaic are mounted on 12 x 12 sheet	ts with an 1/8 inch - 1/4 inch	grout inint	

^{*}Mosaic are mounted on 12 x 12 sheets with an 1/8 inch - 1/4 inch grout joint.


COORDINATING TRIM

Nominal (in)**	Thickness (in)	Finish	
1/2 x 6 Arrow Liner	5/8	Gloss	
1/2 x 6 Dome Liner	5/8	Gloss	
2-1/2 x 6 Chair Rail	3/4	Gloss	
3 x 6 Bullnose	3/8	Gloss	
3 x 3 Bullnose Corner	3/8	Gloss	
3 x 3 2-1/2 x 6 Bullnose Corner Chair Rail	3 x 6 Bullnose	1/2 x 6 Dome Liner	1/2 x 6 Arrow Liner

** Handcrafted Variation

Handwritten tiles are manufactured to appear handmade. Due to this handmade appearance, variations in size, thickness, flatness and color are to be expected. Therefore, blending the tile before and during installation is recommended.

Example Sizes (Field tile available in all colors)

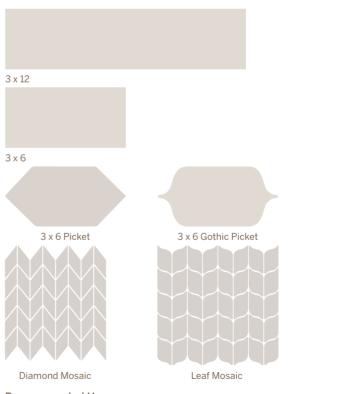

Recommended Use

Crossville recommends Handwritten tile for interior vertical surfaces in all residential and light commercial applications. Applications may include light-duty bathroom walls, vanity tops, kitchen backsplashes, and light-duty kitchen countertops.





Simpatico

- Features contemporary textures is gloss or satin finishes
- 6 x 24 and 12 x 24 inch formats offer added versatility
- Coordinates with Color by Numbers

Visit the website to learn more:

CrossvilleInc.com/Products/Simpatico



Neutrals







LWT18 Goodwill Gloss/Satin*

ates with Color by Numbers WT18 1812 Overture



LWT22 Kinship Gloss



LWT17 Sync Gloss/Satin*
Coordinates with Color by Numbers WT17 Edge of Seventeen



LWT06 Camaraderie Gloss/Satin*
Coordinates with Color by Numbers WT06 Sixth Sense

Textures (Available in LWT02 only, 12 x 24 only)*



LWT02.11224BOTG Botanic Gloss LWT02.11224BOTS Botanic Satin

LWT02.11224CUBG Cube Gloss LWT02.11224CUBS Cube Satin

Sizes & Finishes (Available in all colors)

FΙ	EL	D	TI	LE

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24	146 x 590	9.3	Gloss/Satin*
12 x 24	294 x 590	9.3	Gloss/Satin*
Crossyille recommends a m	inimum 2mm grout joint		

 $Cross ville \, recommends \, a \, minimum \, 2mm \, grout \, joint. \\ * \, Please \, note \, that \, color \, LWT22 \, is \, only \, available \, in \, gloss \, finish \, and \, all \, textures \, are \, only \, available \, in \, the \, 12 \, x \, 24 \, size. \\$

This tile is calibrated (non-rectified).

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 24 Single Bullnose*	71.4 x 590	9.3	Gloss/Satin*
*Bullnose only available in neutral color	S.		

3 x 24 Single Bullnose

Recommended Use

Simpatico tile is recommended for interior vertical surfaces in all residential and light commercial applications.

Example Sizes (Field tile available in all colors)



12 x 24



6 x 24






Necessary Objects






NECO3 Stone Gloss/Satin



Neutral Territory



NEU11 Shadow Gloss/Satin



NEU13 Seashell Gloss/Satin



NEU15 Smokestack Gloss/Satin



NEU12 Warm Silver Gloss/Satin

NECO4 Coal Gloss/Satin



NEU14 Old Lace Gloss/Satin



NEU16 Sea Ice Gloss/Satin

Brilliant Deduction



BRI21 Cobalt Gloss



BRI23 Lipstick Gloss



BRI25 Petrol Gloss



BRI22 Mulberry Gloss





BRI26 Spruce Gloss








FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 6	73 x 148	8	Gloss/Satin*
6 x 6	148 x 148	8	Gloss/Satin*
2 x 8	48 x 198	8	Gloss/Satin*
4 x 8	98 x 198	8	Gloss/Satin*
3 x 12	73 x 298	8	Gloss/Satin*

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 6 Single Bullnose	73 x 148	8	Gloss/Satin*
4 x 8 Single Bullnose	98 x 198	8	Gloss/Satin*
3 x 12 Single Bullnose	73 x 298	8	Gloss/Satin*
3 x 3 Double Bullnose	73 x 73	8	Gloss/Satin*
4 x 4 Double Bullnose	98 x 98	8	Gloss/Satin*
4 x 8 Cove Base	98 x 198	8	Gloss/Satin*
4 x 8 Cove Base Corner Left/Right	98 x 198	8	Gloss/Satin*

Example Sizes (See chart for availability)



Recommended Use

Swatches tile is recommended for interior vertical surfaces in residential and commercial applications.

COLOR/SIZE AVAILABILITY CHART

			Field Tile			Trim									
Collection	Color	Finish	2x8	4x8	3x12	6x6	3x6	4x8 SBN	3x12 SBN	3x6 SBN	4x4 DBN	3x3 DBN	4x8 CB	4x8 CBL	4x8 CBR
I	NEC01	Satin	✓	✓	✓	✓	✓	✓	✓	√	✓	✓	✓	✓	✓
	NEC01	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC02	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Necessary	NEC02	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Objects	NEC03	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC03	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC04	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC04	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEU11	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU11	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU12	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU12	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU13	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
Neutral	NEU13	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
Territory	NEU14	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU14	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU15	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU15	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU16	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU16	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	BRI21	Gloss			✓										
	BRI22	Gloss			✓										
Brilliant	BRI23	Gloss			✓										
Deduction	BRI24	Gloss			✓										
	BRI25	Gloss			✓										
	BRI26	Gloss			✓										

Crossville recommends a minimum 2mm grout joint.

This product is calibrated (non-rectified).

* Please note that all Brilliant Deduction colors are only available in gloss finish.



Inside | Pietra-Di-Cardoso Grigio Flamed - L9363

Porcelain Tile Panels







BLEND

CALCE

CAVA

COLLECTION

FILO

FOKOS

I NATURALI


I NATURALI PIETRA DI SAVOIA

INSIDE

OSSIDO

OXIDE



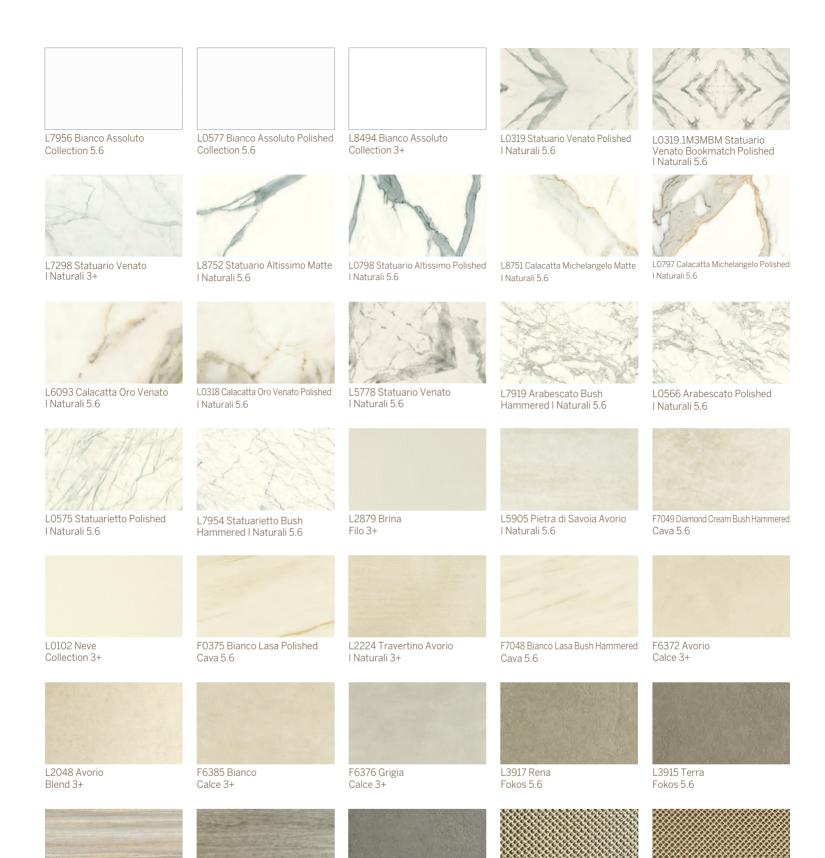

L3916 Roccia

Fokos 5.6

L2092 Argento

Filo 3+

L2093 Oro


Filo 3+

L3122 Ossidiana Vena Grigia

I Naturali 3+

L8705 Travertino Grigio Venato

I Naturali 5.6

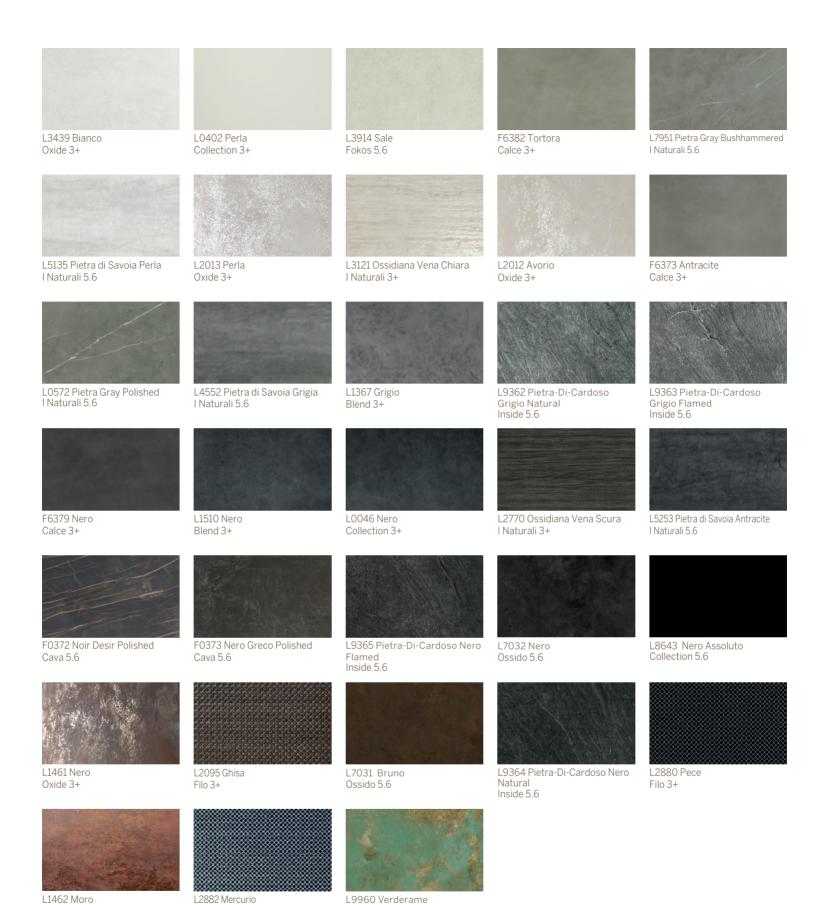

Ossido 5.6

Oxide 3+

Filo 3+







Blend

Flexible and versatile and inspired by cement, with a special speckled visual effect. It reveals remarkably broad-ranging application possibilities, making it ideal for both the world of interior design.

Visit the website to learn more: CrossvilleInc.com/Products/Blend

Blend | L1510 Nero

Daily Grill | Architects: Kelly Architect (George Kelly and Jen Smith) View this case study at CrossvilleInc.com



Stocking Avorio - L2048 - 3+ (Walls)



Stocking Grigio - L1367 - 3+ (Walls)



Stocking Nero - L1510 - 3+ (Walls)



Blend | L1367 Grigio

1 meter x 3 meter panels

32.29 sq. ft./piece

Piece Lbs./piece

Lbs./piece 51.66 lbs./piece Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M

Information listed here is subject to change.

Please refer to CrossvilleInc.com for the latest, most accurate information.









Stocking Bianco - F6385 - 3+ (Walls)



Stocking Avorio-F6372 - 3+ (Walls)



Stocking Grigio - F6376 - 3+ (Walls)



Stocking Tortora - F6382 - 3+ (Walls)



Stocking Antracite - F6373 - 3+ (Walls)



Stocking Nero - F6379 - 3+ (Walls)



Wall: **Calce** | F6372 Avorio Floor: **I Naturali** | L6093 Calacatta Oro Venato

1 meter x 3 meter panels

 3+

 Piece
 32.29 sq. ft./piece

 Lbs./piece
 51.66 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M









Stocking Bianco Lasa Polished** - F0375 - 5.6 (Floors & Walls)



Stocking Bianco Lasa Bush Hammered - F7048 - 5.6 (Floors & Walls)



Stocking Diamond Cream Bush Hammered - F7049 - 5.6 (Floors & Walls)



Stocking Noir Desir Polished** - F0372 - 5.6 (Floors & Walls)



Stocking Nero Greco Polished** - F0373 - 5.6 (Floors & Walls)

**Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.



Wall: **Cava** | F0375 Bianco Lasa Polished Floor: **Moonstruck** | AV305 Apollo 12 x 24 UPS

1 meter x 3 meter panels

5.6 32.29 sq. ft./piece 93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size

Piece

Lbs./piece



1M x 3M







Collection | L0402 Perla and L8494 Bianco Assoluto Keyence Corporation View Case Study at CrossvilleInc.com



Stocking Perla - L0402 - 3+ (Walls)




Stocking Neve - L0102 - 3+ (Walls)



Stocking Nero Assoluto- L8643 - 5.6 (Floors & Walls)



Stocking Nero - L0046 - 3+ (Walls)



Stocking Bianco Assoluto - L0577 Polished - 5.6 (Floors & Walls)



Stocking Bianco Assoluto - L8494 Matte - 3+ (Walls) **Stocking** Bianco Assoluto - L7956 Matte - 5.6 (Floors & Walls)

Note: These photos depict base color and sheen. Please refer to our website for a more accurate depiction of veining and pattern.



Floor: Collection | L0402 Perla

1 meter x 3 meter panels

	3+	5.6
Piece	32.29 sq. ft./piece	32.29 sq. ft./piece
Lbs./piece	51.66 lbs./piece	93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M







Filo

Technology and research into materials lead to the creation of a surprising texture, stemming from the image of a continually repeated glistening wire that forms a woven pattern, a shiny metal surface.

Visit the website to learn more: CrossvilleInc.com/Products/Filo



express elevators fl. 4, 9, 23 >


Independencei

Walls: **Filo** | L2882 Mercurio Independence Blue Cross

View Case Study at CrossvilleInc.com



Stocking Brina - L2879 - 3+ (Walls)



Stocking Argento - L2092 - 3+ (Walls)



Stocking Oro - L2093 - 3+ (Walls)



Stocking Ghisa - L2095 - 3+ (Walls)



Stocking Pece - L2880 - 3+ (Walls)



Stocking Mercurio - L2882 - 3+ (Walls)



Filo | L2095 Ghisa

1 meter x 3 meter sheets

 State
 3+

 Piece
 32.29 sq. ft./piece

 Lbs./piece
 51.66 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M







158



Stocking Sale - L3914 - 5.6 (Floors & Walls)



Stocking Rena - L3917 - 5.6 (Floors & Walls)



Stocking Terra - L3915 - 5.6 (Floors & Walls)



Stocking Roccia - L3916 - 5.6 (Floors & Walls)



Fokos | L3916 Roccia

1 meter x 3 meter panels

 5.6

 Piece
 32.29 sq. ft./piece

 Lbs./piece
 93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M





* I Naturali

Maximum freedom of expression and unexplored possibilities in interior design create a unique collection, which enhances the formal elegance of stone in large dimensions, with reduced thickness, easy handling and speedy application.

Visit the website to learn more: CrossvilleInc.com/Products/I-Naturali

Wall: I Naturali | L0572 Pietra Gray Polished Floor: I Naturali | L7951 Pietra Gray Bush Hammered



Stocking Ossidiana Vena Chiara - L3121 - 3+ (Walls)



Stocking Ossidiana Vena Grigia - L3122 - 3+ (Walls)



Stocking Travertino Grigio Venato Bushhammered - L8705 - 5.6 (Floors & Walls)



Stocking Pietra Gray Bushhammered - L7951 - 5.6 (Floors & Walls)



Stocking Pietra Gray Polished - L0572 - 5.6 (Floors & Walls)



Stocking Ossidiana Vena Scura - L2770 - 3+ (Walls)



Stocking Travertino Avorio L2224 - 3+ (Walls)



Floor: I Naturali | L8752 Statuario Altissimo Wall: I Naturali | L0798 Statuario Altissimo Polished

1 meter x 3 meter panels

	3+	5.6
Piece	32.29 sq. ft./piece	32.29 sq. ft./piece
Lbs./piece	51.66 lbs./piece	93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M

Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.







Stocking Statuario Altissimo Matte -L8752 - 5.6 (Floors & Walls)



Stocking Calacatta Michelangelo Matte - L8751 - 5.6 (Floors & Walls)



Stocking Statuarietto Polished - L0575 - 5.6 (Floors & Walls)




Stocking Arabescato Bush Hammered - L7919 - 5.6 (Floors & Walls)



Stocking Calacatta Oro Venato - L6093 - 5.6 (Floors & Walls)



Stocking Statuario Venato - L7298 - 3+ (Walls)



Stocking Statuario Venato - L5778 - 5.6 (Floors & Walls)



Stocking Statuario Venato Polished** - L0319 - 5.6 (Floors & Walls)



Stocking Statuario Altissimo Polished - L0798 - 5.6 (Floors & Walls)



Stocking Calacatta Michelangelo Polished - L0797 - 5.6 (Floors & Walls)



Stocking Statuarietto Bush Hammered - L7954 - 5.6 (Floors & Walls)



Stocking Arabescato Polished - L0566 - 5.6 (Floors & Walls)



Stocking Calacatta Oro Venato Polished** - LO318 - 5.6 (Floors & Walls)



 $\textbf{Stocking} \ \ \text{Statuario Venato Bookmatch Polished} \ \ \text{-L0319.1M3MBM} \ \text{-} \ 5.6 \ \ \text{sold as 2 pieces} \ \ \text{(Floors \& Walls)}$



I Naturali Pietra di Savoia

Maximum freedom of expression and unexplored possibilities in interior design create a unique collection, which enhances the formal elegance of stone in large dimensions, with reduced thickness, **EXIT**

easy handling and speedy application.

CrossvilleInc.com/Products/I-Naturali

Floor: I Naturali Pietra di Savoia | Pietra di Savoia Grigia

Wall: Color By Numbers | WT06 Sixth Sense 4 x 12 Satin and WT14 Carbon-14 4 x 8 Gloss



Stocking Pietra di Savoia Avorio - L5905 - 5.6 (Floors & Walls)



Stocking Pietra di Savoia Perla - L5135 - 5.6 (Floors & Walls)



Stocking Pietra di Savoia Grigia - L4552 - 5.6 (Floors & Walls)



Stocking Pietra di Savoia Antracite - L5253 - 5.6 (Floors & Walls)



Wall: I Naturali | L5253 Pietra di Savoia Antracite Floor: I Naturali | L4552 Pietra di Savoia Grigia

1 meter x 3 meter panels

	3+	5.6
Piece	32.29 sq. ft./piece	32.29 sq. ft./piece
Lbs./piece	51.66 lbs./piece	93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M

Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.







Stocking Pietra-Di-Cardoso Nero Natural - L9364 - 5.6 (Floors & Walls)



Stocking Pietra-Di-Cardoso Nero Flamed - L9365 - 5.6 (Floors & Walls)



Stocking Pietra-Di-Cardoso Grigio Natural - L9362 - 5.6 (Floors & Walls)



Stocking Pietra-Di-Cardoso Grigio Flamed - L9363 - 5.6 (Floors & Walls)



Floor: In-Side | L9363 Pietra-Di-Cardoso Grigio Flamed Wall: In-Side | L9362 Pietra-Di-Cardoso Grigio Natural

1 meter x 3 meter panels

5.6 32.29 sq. ft./piece 93.96 lbs./piece

Piece Lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size

1M x 3M

Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.





Ossido

Big gets bold with Crossville's Ossido porcelain tile panels by Laminam. Each panel evokes the look of materials left to weather and oxidize, capturing the perfect moment of nature's transformation in porcelain. From verdigris copper to weathered steel, each 1m x 3m panel is packed with personality and visual texture that will never corrode or transfer like the materials that inspired it. This true merger between art and the best in ceramics technology offers a new, rich palette of everlasting style for designers and architects alike. Stocked in 5.6mm for fl ors, walls, and counters, Ossido is also available in 3+ for walls through special order.

Visit the website to learn more: CrossvilleInc.com/Products/Ossido



Stocking Nero -L7032 5.6 (Floors & Walls)



Stocking Bruno - L7031 - 5.6 (Floors & Walls)



Stocking Verderame - L9960 5.6 (Floors & Walls)



Ossido | L9960 Verderame 5.6

1 meter x 3 meter panels

	3+	5.6
Piece	32.29 sq. ft./piece	32.29 sq. ft./piece
Lbs./piece	51.66 lbs./piece	93.96 lbs./piece

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville customer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M

Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.







Oxide

Oxide collection evokes metal that has reacted to sunlight and has been exposed to the weather over time. This collection was devised to embellish settings with character, which has surprisingly become the solution for a total look.

Visit the website to learn more: CrossvilleInc.com/Products/Oxide

Oxide | Nero

©Charlie Mayer Photography



Stocking Bianco - L3439 - 3+ (Walls)



Stocking Perla - L2013 - 3+ (Walls)



Stocking Avorio - L2012 - 3+ (Walls)



Stocking Nero - L1461 - 3+ (Walls)



Stocking Moro - L1462 - 3+ (Walls)



Oxide | L2013 Perla 3+ City Center West View Case Study at CrossvilleInc.com

1 meter x 3 meter panels

Piece Lbs./piece 32.29 sq. ft./piece 51.66 lbs./piece

3+

Crossvillle Porcelain Tile Panels arrive in oversized crates. A-frames available on request. These A-frames require proper receiving and handling equipment. Check with Crossville ustomer service for details (931-484-2110).

Please refer to the Crossville technical guide online for receiving and handling information at CrossvilleInc.com.

Size



1M x 3M

Polished finishes require a penetrating sealer prior to grouting.

Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.





SPECIAL ORDER

If you didn't find the perfect fit for your next project in our stocking section, please view the panels available by special order. These panels are imported from Italy and must be ordered in full crate quantities. Lead time is 14-16 weeks from time Purchase Order is placed. Orders cannot be canceled after 48 hours from Purchase Order being placed.



Special Order L0330 Ardesia Bianco A SpaccoTextured I Naturali 5.6

Special Order

Collection 5.6

L0018 Perla Polished



Special Order L4382 Bianco Oxide 5.6

Special Order

I Naturali 3+

Avorio

L6189 Pietra di Savoia



Special Order L3764 Perla Oxide 5.6

Special Order

Collection 5.6

L3502 Perla

Special Order

Invisible White Matte

L8946 | Naturali 3+



Special Order L0870 Invisible White Polished I Naturali 5.6



Special Order L4035 Avorio Oxide 5.6



L8947 Arabascato Matte

Special Order

I Naturali 5.6

Special Order L5254 Pietra di Savoia Perla I Naturali 3+



Special Order L4489 Sale Fokos 3+



Special Order L6556 Grigio Calce 5.6



Special Order L8935 Statuarietto I Naturali 3+



Special Order L7297 Calacatta Oro Venato Matte I Naturali 3+



Special Order L0110 Avorio Collection 3+



Special Order F7923 Bianco Lasa Matte Cava 3+



Special Order L7301 Corda 3+ L7127 Corda 5.6 Legno Venezia



Special Order Diamond Cream L7930 Matte Cava 3+ F03756 Polished Cava 5.6



Special Order L4959 Travertino Navona I Naturali 5.6



Special Order L7012 Avorio Calce 5.6



Special Order L4538 Avorio Blend 5.6



Special Order L7016 Bianco Calce 5.6



Special Order L9024 Avorio Bush Hammered Cementi 5.6



Special Order L4938 Travertino Romano Bush Hammered I Naturali 5.6



Special Order L7180 Sabbia 3+ L7128 Sabbia 5.6 Legno Venezia



Special Order L4903 Rena Fokos 3+



Special Order L4496 Terra Fokos 3+



Special Order F7467 Oro Seta 3+



Special Order L4021 Moro Oxide 5.6



Special Order L4018 Nero Oxide 5.6



Special Order L9962 Verderame Ossido 3+



Special Order LO318.1M3MBM Calacatta Oro Venato Bookmatch Polished (Sold as 2 pieces) I Naturali 5.6



Special Order L6093.1M3MBM Calacatta Oro Venato Bookmatch Matte (Sold as 2 pieces) I Naturali 5.6




Special Order L5578.1M3MBM Statuario Venato Bookmatch Matte (Sold as 2 pieces) I Naturali 5.6



Special Order F7464 Gris Seta 3+



Special Order L0047 Fumo Collection 3+



Special Order L0003 Fumo Polished Collection 5.6



Special Order L3503 Fumo Collection 5.6



Special Order L7287 Fumo 3+ L7313 Fumo 5.6 Legno Venezia



Special Order L9026 Grigio Bush Hammered Cementi 5.6



Special Order L9358 Pietra-Piasentina Grigio Matte In-Side 5.6



Special Order L9359 Pietra-Piasentina Grigio Flammed In-Side 5.6



Special Order L3521 Grigio Blend 5.6



Special Order L4968 Pietra di Savoia Grigia I Naturali 3+



Special Order L2225 Basalto Vena Chiara Matte I Naturali 3+



Special Order L7014 Tortora Calce 5.6



Special Order L7013 Antracite Calce 5.6



Special Order L4482 Roccia Fokos 3+



Special Order L4879 Piombo 3* L4338 Piombo 5.6



Special Order L5136 Pietra di Savoia Antracite I Naturali 3+



Special Order L8938 Nero Assoluto Collection 3+



Special Order F7465 Liquorice Seta 3+



Special Order L7015 Nero Calce 5.6



Special Order L4401 Nero Blend 5.6



Special Order L7947 Pietra Gray Matte I Naturali 3+



Special Order L7027 Nero 3+



Special Order L2742 Basalto Vena Scura Matte I Naturali 3+



Special Order L9022 Nero Bush Hammered Cementi 5.6



Special Order L0331 Ardesia Nero A SpaccoTextured I Naturali 5.6



Special Order L9797 Pietra-Piasentina Taupe Matte In-Side 5.6



Special Order L9041 Pietra-Piasentina Taupe Flammed In-Side 5.6



Special Order L9370 Porfido Marrone Matte In-Side 5.6



Special Order L9371 Porfido Marrone Flammed In-Side 5.6



Special Order F7466 Glace Seta 3+



Special Order L7945 Noir Desir Matte Cava 3+



Special Order

F7045 Noir Desir

Special Order L0569 Emperador Extra Polished



Special Order L7940 Nero Greco Matte Cava 3+



Special Order L7028 Bruno Ossido 3+



Special Order L7937 Emperador Extra Bushhammered I Naturali 5.6



I Naturali 5.6



Special Order L7935 Emperador Extra Matte I Naturali 3+

Tile-Over-Tile

- Create a fresh and flawless space in a faster turnaround when you capture the benefits of the Tile-Over-Tile project
- Time is money
- No or reduced demolition
- Larger thin tile = Big Results

Visit the website to learn more

CrossvilleInc.com/Design-Inspiration/Blog/ Tile-Over-Tile-Installations-With-Crossville-Porce

I Naturali | L3121 Ossidiana Vena Chiara Holy Cross Hospital, Fort Lauderdale, FL View Case Study at CrossvilleInc.com



This panel depicts each step in the Tile-Over-Tile Process

TILE-OVER-TILE

Think Thin – Embrace Tile-Over-Tile Installations

Updating a space that has existing but dated tile is highly desirable. Demolition, downtime, and dollars may make a full remodel unattainable. Crossville's Porcelain Tile Panels offer many unique and highly functional features including a new approach to remodeling – Tile-Over-Tile.

Create a fresh and flawless space in a faster turnaround when you capture the benefits of a Tile-Over-Tile project:

TIME IS MONEY

- Faster room turnaround to quickly reestablish the function and usage of the space
- · Lower material and labor costs
- Removing the tile added for tear out and replacement of substrates can significantly reduce the overall time for the remodel

NO OR REDUCED DEMOLITION

- · Eliminate sound and health contamination
- Reduce waste to landfills
- · Minimalize dirt and dust during installation
- Lower Volatile organic compounds (VOC)

LARGER, THIN TILE = BIG RESULTS

- Smaller and fewer grout joints reduces the opportunity for mold and bacteria
- Contemporary modern clean aesthetic
- Thin tile (3+mm and 5.6mm thickness) easily covers existing tile without adding bulk
- Easy to clean, simplified maintenance
- Lifecycle of porcelain ensures a lifetime of beauty and performance

Take a moment to consider when a Tile-Over-Tile project can add even more value to an installation.







After

To the right, see Holy Cross Hospital's before and after shots of their Tile-Over-Tile project.

For more information on this project, view our Holy Cross Case Study at CrossvilleInc.com.



Technical Information

COLOR AND SIZE REFERENCE CHART

Series and Color	Item Codes		Special Order Sizes	
	3+ 1M3M	5.6 1M3M	3+	5.6
Blend Avorio	L2048.1M3M	L4538.1M3M		Х
Blend Grigio	L1367.1M3M	L3521.1M3M		Х
Blend Nero	L1510.1M3M	L4401.1M3M		Х
Calce Antracite	F6373.1M3M	L7013.1M3M		Х
Calce Avorio	F6372.1M3M	L7012.1M3M		Х
Calce Bianco	F6385.1M3M	L7016.1M3M		Х
Calce Grigio	F6376.1M3M	L6556.1M3M		Х
Calce Nero	F6379.1M3M	L7015.1M3M		X
Calce Tortora	F6382.1M3M	L7014.1M3M		Х
Cava Bianco Lasa Bush Hammered		F7048.1M3M		
Cava Bianco Lasa Matte	L7932.1M3M	17010121110111	X	
Cava Bianco Lasa Polished†	E7 30E.11VIOIVI	F0375.1M3M		
Cava Diamond Cream Bush Hammered		F7049.1M3M		
Cava Diamond Cream Matte	L7930.1M3M	17043.11013101	X	_
Cava Diamond Cream Polished†	_,,,,,,	F0376.1M3M	<u> </u>	X
Cava Nero Greco Bush Hammered		F7046.1M3M		X
Cava Nero Greco Bush Hammered Cava Nero Greco Matte	L7940.1M3M	1 / O+O.IIVISIVI	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	_ ×
	L/340.1NI3NI	E0272 114214	Х	_
Cava Nero Greco Polished† Cava Noir Desir Bush Hammered		F0373.1M3M		
	17045114014	F7045.1M3M		Х
Cava Noir Desir Matte	L7945.1M3M	50070 114014	Х	
Cava Noir Desir Polished†		F0372.1M3M		
Cementi Avorio Bush Hammered		L9024.1M3M	_	X
Cementi Grigio Bush Hammered		L9026.1M3M		X
Cementi Nero Bush Hammered		L9022.1M3M		X
Collection Avorio	L0110.1M3M		Х	
Collection Bianco Assoluto Matte	L8494.1M3M	L7956.1M3M		
Collection Bianco Assoluto Polished		L0577.1M3M		
Collection Fumo	L0047.1M3M	L3503.1M3M	Х	Х
Collection Fumo Polished†		L0003.1M3M		Х
Collection Nero	L0046.1M3M			
Collection Nero Assoluto	L8938.1M3M	L8643.1M3M	Х	
Collection Neve	L0102.1M3M			
Collection Perla Matte	L0402.1M3M	L3502.1M3M		Х
Collection Perla Polished [†]		L0018.1M3M		Х
Filo Argento	L2092.1M3M			
Filo Brina	L2879.1M3M			
Filo Ghisa	L2095.1M3M			
Filo Mercurio	L2882.1M3M			
Filo Oro	L2093.1M3M			
Filo Pece	L2880.1M3M			
Fokos Piombo	L4879.1M3M	L4338.1M3M	х	Х
Fokos Rena	L4903.1M3M	L3917.1M3M	х	
Fokos Roccia	L4482.1M3M	L3916.1M3M	Х	
Fokos Sale	L4489.1M3M	L3914.1M3M	х	
Fokos Terra	L4496.1M3M	L3915.1M3M	Х	
I Naturali Arabascato Bush Hammered		L7919.1M3M		
	L8947.1M3M		Х	
I Naturali Arabascato Matte		L0566.1M3M	<u> </u>	
			1	
l Naturali Arabascato Polished		L0330 1M3M		¥
l Naturali Arabascato Polished I Natural Ardesia Bianco A Spacco Textured		L0330.1M3M		X
I Naturali Arabascato Polished I Natural Ardesia Bianco A Spacco Textured I Natural Ardesia Nero A Spacco Textured	2225 1M2M	L0330.1M3M L0331.1M3M		X
I Naturali Arabascato Polished I Natural Ardesia Bianco A Spacco Textured I Natural Ardesia Nero A Spacco Textured I Natural Basalto Vena Chiara Matte	L2225.1M3M		X	
I Naturali Arabascato Polished I Natural Ardesia Bianco A Spacco Textured I Natural Ardesia Nero A Spacco Textured	L2225.1M3M L2742.1M3M		X	

Note: Please Contact Customer Service for lead times and availability. 1M1M and additional cut sizes are also available as special order only. Allow 3-4 weeks lead time for custom cut.

† Polished Finishes require a penetrating sealer prior to grouting. **Please**

Series and Color	Item Codes		Special Order Sizes	
	3+ 1M3M	5.6 1M3M	3+	5.6
I Naturali Calacatta Oro Venato	L7297.1M3M	L6093.1M3M	Х	
I Naturali Calacatta Oro Venato Polished [†]		L0318.1M3M		
I Naturali Emperador Extra Bush Hammered		L7937.1M3M		X
I Naturali Emperador Extra Matte	L7935.1M3M		X	
I Naturali Emperador Extra Polished		L0569.1M3M		X
I Naturali Invisible White Matte	L8946.1M3M	L8948.1M3M	X	X
I Naturali Invisible White Polished	200 10121110111	L0870.1M3M		X
I Naturali Ossidiana Vena Chiara	L3121.1M3M			
I Naturali Ossidiana Vena Grigio	L3122.1M3M			
I Naturali Ossidiana Vena Scura	L2770.1M3M			
I Naturali Pietra Di Savoia Avorio	L6189.1M3M	L5905.1M3M	X	
I Naturali Pietra Di Savoia Grigia	L4968.1M3M	L4552.1M3M	X	
I Naturali Pietra Di Savoia Perla	L5254.1M3M	L5135.1M3M	X	
I Naturali Pietra Di Savoia Antracite	L5136.1M3M	L5253.1M3M	X	_
I Naturali Pietra Gray Bush Hammered		L7951.1M3M	<u> </u>	
I Naturali Pietra Gray Matte	L7947.1M3M	F1301'TINIOINI	X	
I Naturali Pietra Gray Matte I Naturali Pietra Gray Polished	L/34/.1IVISIVI	L0572.1M3M		-
Naturali Statuarietto Bush Hammered		L7954.1M3M		
I Naturali Statuarietto Bush Hammered	L8935.1M3M	L/904.1IVI3IVI	,,	
	L8935.1M3M	L 0575 1M2M	Х	
I Naturali Statuarietto Polished		L0575.1M3M		
I Naturali Statuario Altissimo Matte		L8752.1M3M		
I Naturali Statuario Altissimo Polished	1.7000 11.4014	L0798.1M3M		
I Naturali Bianco Statuario Venato	L7298.1M3M	L5778.1M3M		
I Naturali Statuario Venato Polished [†]		L0319.1M3M		
I Naturali Travertino Avorio	L2224.1M3M			
I Naturali Travertino Grigio Venato Bush Hammered		L8705.1M3M		
I Naturali Travertino Navona Bush Hammered		L4959.1M3M		Х
I Naturali Travertino Romano Bush Hammered		L4938.1M3M		Х
Inside Pietra-Di-Cardoso Grigio Matte		L9362.1M3M		
Inside Pietra-Di-Cardoso Grigio Flamed		L9363.1M3M		
Inside Pietra-Di-Cardoso Nero Matte		L9364.1M3M		
Inside Pietra-Di-Cardoso Nero Flamed		L9365.1M3M		
Inside Pietra-Piasentina Grigio Matte		L9358.1M3M		Х
Inside Pietra-Piasentina Grigio Flamed		L9359.1M3M		Х
Inside Pietra-Piasentina Taupe Matte		L9797.1M3M		Х
Inside Pietra-Piasentina Taupe Flamed		L9041.1M3M		Х
Inside Porfido Mar one Matte		L9370.1M3M		Х
Inside Porfido Mar one Flamed		L9371.1M3M		Х
Legno Venezia Corda	L7301.1M3M	L7127.1M3M	Х	Х
Legno Venezia Fumo	L7287.1M3M	L7313.1M3M	х	Х
Legno Venezia Sabbia	L7180.1M3M	L7128.1M3M	Х	Х
Ossido Bruno	L7028.1M3M	L7031.1M3M	Х	
Ossido Nero	L7027.1M3M	L7032.1M3M	Х	
Ossido Verderame	L9962.1M3M	L9960.1M3M	х	
Oxide Avorio	L2012.1M3M	L4035.1M3M		Х
Oxide Bianco	L3439.1M3M	L4382.1M3M		Х
Oxide Moro	L1462.1M3M	L4021.1M3M		Х
Oxide Nero	L1461.1M3M	L4018.1M3M		Х
Oxide Perla	L2013.1M3M	L3764.1M3M		Х
Seta Glace	F7466.1M3M		х	
Seta Gris	F7464.1M3M		х	
Seta Liquorice	F7465.1M3M		Х	
Seta Oro	F7467.1M3M		х	

Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur.

X Special Order Items are full crate only. Allow minimum 14-16 weeks lead time.

Technical Information

APPLICATIONS

Crossville Porcelain Tile Panels are suitable for many interior and exterior applications:

BUILDING SECTOR

Floor and wall coverings, partition and storage walls, false ceilings, surface finishes and restoration, insulated panels and tunnels.

INTERIOR DESIGN

Surfaces of kitchen and bathroom tops, cupboards, tables, desks, doors and furnishings in general.

SHIPBUILDING SECTOR

The lightness and high technical properties of Crossville Porcelain Tile Panels make it suitable for walls of cruise ships and sports crafts.

COMPOSITE AND STRUCTURAL PANELS

The porcelain tile panels can be placed over other materials to create extremely light and particularly resistant composite and structural panels suitable in all those cases that require high resistance and reduced weight load on the surface.

TECHNICAL SPECIFICATIONS

3+ & 5.6MM

Porcelain obtained by wet grinding of clayish raw materials, granite and metamorphic, feldspar-containing rocks and ceramic pigments. Compacted by a special shaping in compactor and sintering at 1200°C, with controlled firing.

TECHNICAL INFO

3+

3+ is made up of the basic tile panel with the structure reinforced with fiberglass matting applied on the back using special adhesive.

Thickness: 3mm plus .5mm fiberglass mesh.

Use of 3+

Interior and exterior wall coverings and countertops

5.6MM

5.6mm is the tile panel without reinforcing mesh. Thickness: 5.6mm

Use of 5.6mm

- · Interior floors below, above, and slab on grade concrete and interior and exterior wall coverings and countertops. (See Crossville Technical Guide for more information)
- · Polished finish s require a penetrating sealer prior to grouting. Please Note: Due to DCOF value, these tile panels are not recommended for applications in wet areas or areas where standing water may occur

Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.

Third party certified pre-consumer, recycled content certificat s available on the website.

EDGE FINISHING TECHNIQUES



3+ and 5.6mm **Using Profiles**



5.6mm Field Applied Bullnose



5.6mm Back Mitered and Epoxied



Distinctive Values

MAIN FEATURES

Dimensions 1000mm x 3000mm Perfectly Flat 3+: 51.66 lbs / pc 5.6: 93.96 lbs / pc

CHEMICAL RESISTANCE

Porcelain tile panels resist organic and inorganic solvents, disinfectants and detergents. It can be easily cleaned without affecting its surface characteristics; the only product that can attack the tile panels is hydrofluoric acid.

WEAR RESISTANCE

Porcelain tile panels are highly scratch proof and resistant to deep abrasion. The properties of the tiles remain unchanged even after intensive use and frequent cleaning.

HIGH FLEXURAL STRENGTH

Porcelain tile panels have a high modulus of rupture. 3+ and 5.6 are both 50 MOR which are high values. Typical porcelain value is 35-37.

FROST RESISTANCE

Porcelain tile panels average water absorption is 0.1% therefore it is frost resistant and suitable for any weather condition.

FIRE RESISTANT

Porcelain tile panels do not contain organic material therefore it is resistant to fire and high temperatures.

CHROMATIC PROPERTIES

Porcelain tile panels does not contain organic pigments and is resistant to UV rays. Even if subjected to severe climate changes, the colors remain stable.

GRAFFITI

Porcelain tile panels are a graffiti resistant ceramic surface; it is easy to clean and even the strongest paints can be removed.



Inside | Pietra-Di-Cardoso Nero Natural - L9364

SUSTAINABLE

- The use of hybrid kilns that combine gas and electricity significantly reduces CO2 emissions in the atmosphere
- Laminam has led the way to a photovoltaic system being installed on the roofs of its two Fiorano Modenese plants
- Over a year, this photovoltaic system guarantees the production of around 1,050 GWh, thereby enabling the company to produce 10% of its energy requirements
- In terms of CO2 reduction, Laminam's photovoltaic roof system eliminates the release of 525 tons of CO2 into the atmosphere annually
- Member of the Green Building Council Italia, this Italian association
 of manufacturing leaders strive to transform the building market
 towards environmental sustainability and to build livable communities.
 Partners of GBC Italia promote environmental, economic and social
 responsibility by innovating the way in which buildings are designed,
 built and used.

Technical Information



Wall: I Naturali | L3121 Ossidiana Vena Chiara

ENVIRONMENTAL STATEMENT

Crossville Porcelain Tile Panel collections are excellent choices for those seeking green surfacing solutions for design projects. These tile panels are responsibly made with natural raw materials in the heart of Italy's renowned tile production region. The panels are produced in one of the most advanced, environmentally sound manufacturing facilities in the world. Reflecting global standards in sustainability, the Crossville manufacturing process uses leading edge technology, recycling practices, and incorporates innovative methods to minimize waste and generate energy without depleting the earth's resources.

Created to meet Green Building Council standards, these panels support specifiers' goals for durable, healthy environments. The porcelain tile panels do not release emissions or substances into the environment. Manufacturing requires minimal maintenance, contributing to indoor air quality and providing ease of cleaning long term. The panels' superior performance characteristics lead to long product lifecycles—reducing the need for replacement. However, should panels need to be removed, they can simply be separated from their mesh, milled, and recycled back into the tile production stream.

As porcelain tile panels' popularity grows, the green innovations at the Laminam manufacturing facility advance, do as well. The plant's recently installed photovoltaic roof has already produced 1 GWh of energy and is capable of generating an estimated 1.387 GWh within a year. This will cut CO2 emissions into the atmosphere by 617 tons and empower the Laminam plant to self-generate 15% of its energy requirements.

Distributed exclusively in the U.S. by Crossville, many Laminam porcelain tile panel collections are stocked on American soil. This not only allows for prompt order fulfillment, but it also aids in minimizing fuel and energy consumption related to international shipping and transportation.







Porcelain Slabs







BLACK TIE
NIGHT WATCH
FILM NOIR
SUSPENSE
BALTIC
WHEAT FIELD
FEMME FATALE
LIGHTNING
STATE OF GRACE
SUGAR COAT

Porcelain Slabs

Crossville Porcelain Slabs. – where creative solutions don't compromise. Other slab materials may stain, crack, or yellow; our 12mm thick 100% porcelain products excel. The same as the porcelain tile and panel products you know, these beautiful designs are built to last. Just like your design.

Zð.

INE Omier, Lemon and Pore 6000 Large 100/200/200

CHOST L SMEEK, AND 6003 TEX LARGE 1507/2207550

ALER , samer, apple, and boil ned to light polytoolyto

LLET EMOR, APPLE, AND LEAD LARGE 150/200/540 Smoothies

BERRY BLASTER
RANGERES, CON REPORT, NUMBERES, AND BLACKERSES, DILEMES, AND BLACKERSES,
CHARGE STAT FROM SHALL TO LIMBE 100/700/700/

BANANZA TANGERINA EMUNIC, UNIGERIES, MORE EMUNIC, DID HE MENTION KANNAKS? CAUDIE 92E FROM SMALL ID LIRRE 110/720/550

GOD'S TEARS
RECIPIES MACRETINES, PROPERS, MPLES, MIN, AND WHIPOKEAN
GROOME SIZE FROM SMALL TO LIBRIC SPECIFICACIONS.

PURE ECSTACY

ORDER STET FROM SMALL TO LINKE 150/200/SCO

ORDER STET FROM SMALL TO LINKE 150/200/SCO

Coconuit Bowls

TROPIC EXPERIENCE
COCONIL RANAMAS, RUIEBERRIES, APPLES, AND RIMI
MORIE SIZE FROM SMALL TO LARGE TOO/TOO/TOO
TO THE PROPERTY OF THE MARKET

LITTE THE MOUNT OF W MISSORY

BAHAMA MAMA

NANAS, UNIGERIES, APPLES, GRAPES, SIRANDERRIES, AND PINEAPPLES

OALORE 92E 190M SMALL TO LARGE 110/220/350

HONOLULU BLEND

THONOLULU BLEND

BURNES, BLACKERSKIS, PRAGPLES, APPLES, AND KIWI

ALORE 92E FROM SMALL TO LARGE 90/100/170

SO 6000, YOUT THOUGH NAME REPUBLISH

UNCHARTED ISLAND

LE, BUIEDERBIES, SPRANDERBIES, APPLES, AND LEMONS

ONE SIZE FROM SAMIL TO LEMON

Visit the website to learn more:

CrossvilleInc.com/Products/Crossville-Porcelain-Countertops



Black Tie UP - PC008.1SLAB12

Black Tie PO-PC009.1SLAB12



Night Watch PO - PC010.1SLAB12



Film Noir UP- PC005.1SLAB12



Suspense UP - PC006.1SLAB12

Note: These photos depict base color and sheen. Please refer to actual material for a more accurate depiction of veining and pattern.

Information listed here is subject to change.

Speak to your customer service rep for the latest, most accurate information.

Black Tie Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12

- Subtle white veining makes this the ultimate classic for dark counters
- Black body color coordinates with dominate color for unnoticeable edges
- This material will not lighten or yellow in UV light, and is frost and heat resistant

Night Watch Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12


Black Tie PO - PC009.1SLAB12

- Coordinates with Crossville's Cava Noir Desir Porcelain Tile Panel
- Black body color coordinates with dominate color for unnoticeable edges
- This material will not lighten or yellow in UV light, and is frost and heat resistant

Film Noir and Suspense Porcelain Slabs

Thickness (mm)	Weight	Size
12	30kg/m ²	1620 x 3240mm (63.8" x 127.6")

- Coordinates with Crossville's Notorious porcelain floor and wall tile
- Does not require sealing like traditional concrete looks
- This material will not lighten or yellow in UV light, and is frost and heat resistant

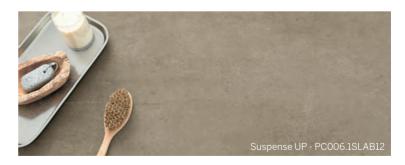


Size



1620mm x 3240mm





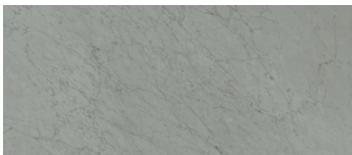

Baltic UP - PC001.1SLAB12



Baltic PO - PC002.1SLAB12



Femme Fatale UP - PC007.1SLAB12



Wheat Field UP - PC013.1SLAB12



Wheat Field PO - PC014.1SLAB12

Blatic Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12

- The material mimics natural stones without the maintenance
- \bullet Cool grey tones extend through the body for unnoticeable edge treatments
- This material will not lighten or yellow in UV light, and is frost and heat resistant



Femme Fatale Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m^2	12

- Coordinates with Crossville's Notorious porcelain floor and wall tile
- Does not require sealing like traditional concrete looks
- This material will not lighten or yellow in UV light, and is frost and heat resistant

Wheat Field Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12

- The material mimics natural stones without the maintenance
- Warm neutral tones extend through the body for unnoticeable edge treatments
- This material will not lighten or yellow in UV light, and is frost and heat resistant



Note: These photos depict base color and sheen. Please refer to actual material for a more accurate depiction of veining and pattern.

Information listed here is subject to change.

Speak to your customer service rep for the latest, most accurate information.



Lightning UP - PC003.1SLAB12

	- market		
		My man	
			Ž.
and the same of th			July 1
- S - will			
Market State of the State of th			

1		
and the same	John Marie Marie	

Lightning PO - PC004.1SLAB12

Lightning Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12

- The material mimics natural stones without the maintenance
- Soft neutral tones extend through the body for unnoticeable edge treatments
- •This material will not lighten or yellow in UV light, and is frost and heat resistant










State of UP - PC011.1SLAB12



State of Grace PO - PC012.1SLAB12



Sugar Coat UP - PC015.1SLAB12



Sugar Coat PO - PC016.1SLAB12

State of Grace Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m ²	12

- The material mimics natural stones without the impracticality of marble
- Coordinates with Crossville's State of Grace porcelain floor and wall tile
- White body color coordinates with dominate color for unnoticeable edges
- •This material will not lighten or yellow in UV light, and is frost and heat resistant



Sugar Coat Porcelain Slabs

Size	Weight	Thickness (mm)
1620 x 3240mm (63.8" x 127.6")	30kg/m²	12

- The super white coloration extends through the body for uninterrupted edge treatments
- This material will not lighten or yellow in UV light, and is frost and heat resistant



Note: These photos depict base color and sheen. Please refer to actual material for a more accurate depiction of veining and pattern.

Speak to your customer service rep for the latest, most accurate information.





Your Advantage...

Super-realistic visuals combine with advanced technical properties to outperform stone, quartz, and even other sintered and porcelain products available today.

Fired with added fiberglass reinforcement on the back, our Porcelain Slabs are high strength and non-porous. The result of world-class manufacturing is unparalleled in the industry.

LONGER LASTING

- Stain resistant
- Resistant to heat and high temperatures
- Resistant to chemicals, acids, alkalis, and solvents
- Resistant to scratching and abrasions
- Fire resistant

EASIER TO MAINTAIN

- Requires no special cleaning products
- Resistant to mold and fungi
- Graffiti resistant

PERFECT FOR OUTDOORS

- Frost resistant
- · Colorfast in UV light and severe climate change

EASIER TO FABRICATE

- · Dimensional stability makes it easier to cut
- Stressless product to prevent splintering and cracking
- No stress cuts are required

Our unique combination of innovative porcelain products and incomparable customer service offers creative solutions that other countertops can't deliver, for the look you want and the performance your space demands.

DISTINCTIVE VALUES

MAIN FEATURES

Dimensions 1620mm x 3240mm (63.8" x 127.6") Perfectly Flat 12mm thick, 30kg/m²



CHEMICAL RESISTANCE

Crossville Porcelain Slabs resist organic and inorganic solvents, disinfectants and detergents. They can be easily cleaned without affecting its surface characteristics; the only product that can attack our counters is hydrofluoric acid.



WEAR RESISTANCE

Crossville Porcelain Slabs are highly scratch resistant and resistant to deep abrasion. The properties of the Porcelain Slabs remain unchanged even after intensive use and frequent cleaning.



HIGH FLEXURAL STRENGTH

Crossville Porcelain Slabs have high modulus of rupture.



FROST RESISTANCE

Crossville Porcelain Slabs average water absorption is 0.1% making them frost resistant in any weather condition.



FIRE RESISTANT

Crossville Porcelain Slabs do not contain organic material therefore are resistant to fire and high temperatures.



CHROMATIC PROPERTIES

Crossville Porcelain Slabs do not contain organic pigments and are resistant to UV rays. Even in the harshest sunlight colors stay true.



GRAFFITI

Crossville Porcelain Slabs are graffiti resistant. Even the strongest paints can be removed.

Technical Considerations

As a designer, you need to know all the details to make your project a success. We invite you to view our Porcelain Slab Fabrication Guide for in-depth specification details. For some of the most commonly asked questions, please read on.


What types of edge treatments are available with Crossville Porcelain Slabs?

Crossville Porcelain Slabs may be finished in a variety of ways. Build the product up with mitered edges to your desired thickness. Keep things sleek and modern with a 12mm eased or bullnosed edge. Or bring in the bling with your favorite metallic edging. Here, the creative solution is yours...





Edge treatment profiles



What is the minimum distance from the edge I can make a cut?

In the design of the countertop, maintain a minimum distance of 50mm from the outer edge before beginning a cut, including those for sinks, faucets, or plugs. 50mm of material must also be maintained between cuts to ensure stability when handling.

The recommended internal corner radius is a minimum of 5mm to distribute stress. While a 90* internal angle may be obtained using a water-jet process, this type of cut increases the possibility of cracking during cutting, transport, and installation

What is the full, usable size of a Crossville Porcelain Slabs?

Each slab can be used to obtain a 1620x3240mm usable surface.


What considerations do I need to give for sinks?

For flush mount installations, please leave a minimum of 2mm between the sink or cook top and the porcelain slab to allow for thermal expansion. When installing an undermount sink, chamfer the edge of the countertop around the hole. Seal the space between the sink/cook top and countertop with silicone, adhesive seal, or an equivalent product. Use one or two support bars fixed to the unit frame to support sinks as this will reduce stress to the countertop.



How do I create an "L" shaped countertop layout?


When creating an "L" shaped counter layout, diagonal joints are not advised. Please seam together in a straight pattern, filling the joint with color-matched silicone or other common seaming materials. Please perform a preliminary check on pieces to make sure both pieces are as compatible as possible.



How far can Crossville Porcelain Slabs overhang?

Overhang dimensions vary by overall countertop proportions. Please refer to our Slab Fabrication Guide for more information.

For more technical guidance on Crossville Porcelain Countertops, please read our Porcelain Slab Fabrication Guide.

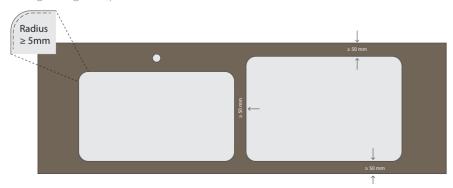



Cleaning

Suggested Cleaners For Problem Stains

In keeping with Crossville's long-standing position on sustainability, we highly recommend the use of low VOC, non-hazardous, and non-polluting products for cleaning and maintaining tile and grout (for specific problem stains, please use the following stain removal chart).

These products are used by tile and maintenance professionals and may not be readily available in all areas. Most household cleaners are sufficient to clean common stains as long as they conform to the standards set forth in the Daily Maintenance Section. In the case where stain removal becomes a problem, contact a cleaning and maintenance product supplier or your local tile distributor for professional suggestions.

In keeping with its commitment to quality, $Crossville^*$ will offer its Technical Service Department for individualized assistance. This department can assist you in the proper installation and maintenance of all Crossville* Porcelain Stone* tiles. Contact Crossville Technical Services at 931.484.2110.

Crossville" recommends the use of professional cleaning and maintenance products. If additional information or assistance is required on a contaminant not listed, or if you need to find out where the products are sold, please call us, or contact one of the companies to the right.

<u>Custom Building Products, Tilelab & Aquamix</u> Seal Beach, CA 90740

800.272.8786 custombuildingproducts.com aguamix.com

Fila Chemicals USA Corp. 10800 NW 21st St. # 170 Miami, FL 33172 305.513.0708 www.filasolutions.com

Miracle Sealants Co.

12318 Lower Azusa Rd. Arcadia, CA 91006-5872 800.350.1901 ext. 3013 miraclesealants.com

	STAIN	FILA	CUSTOM	AQUA MIX	MIRACLE SEALANTS	COMMON	
Food Groups	Mustard Ketchup Mayonnaise Tea Bags Ice Cream Beer/Wine Orange Juice Grape Juice Coffee Coke Soy Sauce	Fila PS87 or Fila SR95	TileLab Grout & Tile Cleaner	Concentrated Stone & Tile Cleaner or Grout Deep Clean	Porcelain & Ceramic Tile Cleaner or Tile & Stone Cleaner or Liquid Poultice or Finish Sealer Stripper	Mr. Clean" Neutral Floor Cleaner" 409" Spic and Span" Fantastic" Comet" Windex" Lysol" Soft Scrub" Mr. Clean Magic Eraser" Bar Keepers Friend"	
Oil & Grease	Vegetable Mineral Petroleum Wax Sealer Meat Grease Hydraulic Oil Trans. Fluid Linseed Oil Lipstick Rubber Shoe Polish Paint (Oil Based)	Fila PS87 or Fila No Spot Fila No Paint Star Fila PS87 or Fila No Paint Star	TileLab Heavy Duty Stripper & Cleaner	Heavy-Duty Tile & Grout Cleaner	Porcelain & Ceramic Tile Cleaner or Tile & Stone Cleaner or Liquid Poultice or Finish Sealer Stripper	Mr. Clean Neutral Floor Cleaner 409 Spic and Span Fantastic Comet Windex Lysol Soft Scrub Mr. Clean Magic Eraser Bar Keepers Friend	
Markers/Graffit	Felt Tip Ink Water Marker Permanent Fluorescent Pencil Crayon	Fila PS87 or Fila SR95 Fila PS87	TileLab Heavy Duty Stripper & Cleaner	Sealer & Coating Remover	Porcelain and Ceramic Tile Cleaner or Mira Strip or Tile Restor or Finish Sealer Stripper	Comet Soft Scrub Mr. Clean Neutral Floor Cleaner ZUD* Mr. Clean Magic Eraser Bar Keepers Friend	
Water-Based Agents	Water Base Paint or Stain	Fila PS87 or Deterdek	TileLab Heavy Duty Stripper & Cleaner	Sealer & Coating Remover	Porcelain & Ceramic Tile Cleaner or Finish Sealer Stripper or Tile & Stone Cleaner	Mr. Clean Neutral Floor Cleaner Comet Mr. Clean Magic Eraser Bar Keepers Friend	
Tile Grout	Cement Latex Polymer	Deterdek or Fila PS87 Fila PS87 Gel	TileLab Sulfamic Acid Cleaner or Grout Haze Remover	Sulfamic Acid Crystals or Phosphoric Acid Substitute or Grout Haze Clean-Up* Sealer & Coating Remover	Heavy Duty Acid Cleaner (HDAC) or Phosphoric Acid or Finish Sealer Epoxy Grout Film Remover		

^{*}For problem stains, it may be necessary to use an abrasive powder compound in conjunction with the above cleaners: With Heavy-Duty Tile & Grout Cleaner or Grout Haze Clean-Up, use Aqua Mix Poultice. Please be careful to follow manufacturers recommended procedures when using any cleaning product. To download a copy of "How to Care for Porcelain Stone" tile," be sure to visit our web site at CrossvilleInc.com.



Tile Performance Data

Alaska™ (UPS) Altered State (UPS) Argent (HON) Argent (UPS) Basalt (UPS) Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Main Street (UPS) Moonstruck (UPS) Nest* (UPS)			Strength	Bond Strength	Coefficien of Friction	Dimensions Range	Range of Thickness	Warpage (Diagonal)	Wedging	Frost Resistance	Chemical Resistance	Scratch Hardness
Altered State (UPS) Argent (HON) Argent (UPS) Basalt (UPS) Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)												
Argent (HON) Argent (UPS) Basalt (UPS) Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	-	≥ 500 lbf	> 200 psi	.4252	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Argent (UPS) Basalt (UPS) Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	-	≥ 500 lbf	> 200 psi	.42 –.52	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Basalt (UPS) Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Java Joint (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	$\pm~0.10\%$	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Bluestone (HON) Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.5060	$\pm 0.10\%$	0.025	± 0.20%	$\pm~0.25\%$	Resistant	Unaffected	7
Bluestone (UPS) Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (UPS) EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 400 lbf	> 200psi	.5060	± 0.15%	0.030	± 0.20%	± 0.25%	Resistant	Unaffected	7
Color Blox*2.0 (UPS) Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (UPS) EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 450 lbf	> 200 psi	.42 – .52	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Cross-Colors Mingles - Polished (PO) - Unpolished (UPS) - Cross-Slate* (CS) - Cross-Tread* (UPS) EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 450 lbf	> 200 psi	.5060	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
- Polished (PO) - Unpolished (UPS) - Cross-Slate® (CS) - Cross-Tread® (CTS)® EcoCycle Americana® (UPS) Empire (PO) Empire (UP) Familiar Territory™ (SPO) Garden (TX) Gotham® (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.50 – .60	± 0.20%	0.030	± 0.20%	± 0.20%	Resistant	Unaffected	7
- Unpolished (UPS) - Cross-Slate® (CS) - Cross-Tread® (CTS)® EcoCycle Americana® (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham® (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)												
- Cross-Slate* (CS) - Cross-Tread* (CTS)* EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 150	350-420 lbf	> 200 psi	.31 – .41	± 0.15%	0.015	± 0.20%	± 0.30%	Resistant	Unaffected	7
- Cross-Tread® (CTS)® EcoCycle Americana® (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham® (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 150	350-420 lbf	> 200 psi	.50 – .60	± 0.15%	0.015	± 0.20%	± 0.30%	Resistant	Unaffected	7
EcoCycle Americana* (UPS) Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 150	350-420 lbf	> 200 psi	.50 – .60	± 0.15%	N/A	± 0.20%	± 0.30%	Resistant	Unaffected	7
Empire (PO) Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 150	350-420 lbf	> 200 psi	.50 – .60	± 0.15%	N/A	± 0.20%	± 0.30%	Resistant	Unaffected	7
Empire (UP) Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	_	≥ 350 lbf	> 200 psi	.42 – .52	± 0.15%	0.030	± 0.20%	± 0.20%	Resistant	Unaffected	7
Familiar Territory™ (UPS) Familiar Territory™ (SPO) Garden (TX) Gotham® (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 110	≥ 425 lbf	> 200 psi	.22 – .32	± 0.20%	0.020	± 0.20%	± 0.40%	Resistant	Unaffected	6
Familiar Territory™ (SPO) Garden (TX) Gotham¹ (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.10%	< 110	≥ 425 lbf	> 200 psi	.42 – .52	± 0.20%	0.020	± 0.20%	± 0.40%	Resistant	Unaffected	6
Garden (TX) Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	-	≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Gotham* (UPS) Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.4252	± 0.15%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Java Joint (UPS) Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.50%	_	≥ 500 lbf	> 200 psi	.5060	± 0.40%	0.040	± 0.40%	± 0.40%	Resistant	Unaffected	7
Jazz Age™ (UPS) Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.025	± 0.20%	± 0.35%	Resistant	Unaffected	7
Main Street (UPS) Moonstruck (HON) Moonstruck (UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.42 – .52	± 0.15%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Moonstruck (HON) Moonstruck (UPS)	< 0.30%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.25%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Moonstruck (HON) Moonstruck (UPS)	< 0.10%	_	≥ 500 lbf	> 200 psi	.58 – .68	± 0.15%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Moonstruck (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
	< 0.20%	_	≥ 500 lbf	> 200 psi	.5060	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
()	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.035	± 0.20%	± 0.25%	Resistant	Unaffected	7
Notorious® (HON)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Notorious® (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.50 – .60	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Physics PO (PO)	< 0.20%	_		> 200 psi	.31 – .41	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
	< 0.20%	_	≥ 350 lbf			± 0.10%		± 0.20%	± 0.30%		Unaffected	7
			≥ 350 lbf	> 200 psi	.50 – .60		0.020			Resistant		
Portugal UPS (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.50 – .60	± 0.10%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Portugal EXT (EXT)	< 0.20%	_	≥ 500 lbf	> 200 psi	.60 – .70	± 0.10%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	
Ready to Wear (UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.020	± 0.20%	± 0.35%	Resistant	Unaffected	7
Reformation™ (UPS)	< 0.20%		≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.030	± 0.20%	± 0.25%	Resistant	Unaffected	7
Relax [™] (UP)	< 0.30%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0 (PO)	< 0.20%	_	≥ 350 lbf	> 200 psi	.31 – .41	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0 (UPS)	< 0.20%	-	≥ 350 lbf	> 200 psi	.50 – .60	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0 (PTN)	< 0.20%	-	≥ 350 lbf	> 200 psi	.42 – .52	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Shades 2.0 SPO (SPO)	< 0.30%	-	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	7
Shades 2.0 UPS (UPS)	< 0.30%	_	≥ 500 lbf	> 200 psi	.50 – .60	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Shades 2.0 PTN (PTN)	< 0.30%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
SpeakEasy (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.5060	± 0.10%	0.035	± 0.20%	± 0.25%	Resistant	Unaffected	7
State of Grace (SAT)	< 0.20%	_	≥ 500 lbf	> 200 psi	.31 – .41	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
State of Grace (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Story Teller™ (UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.15%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7

Test results available on request.

Like any material, Crossville * tile can become slippery when wet. We recommend that care be taken to keep the surface dry.

Color reproduction in the photography in this catalog is representative only. Slight variation is inherent in fired porcelain and natural stone. Before selecting a color, contact your local representative for live samples or order online at crossvilleinc.com

 ${}^* The increased real world traction of these types of surfaces cannot be fully realized by any current DCOF testing methodology due to their exaggerated facial structures.\\$

Wet Area Use For Mosaic Tiles

Crossville® produces mosaic tiles with the Cross-Sheen® finish. The AcuTest® Wet Dynamic COF is ≥ 0.42. Their small sizes ensure frequent grout joints which provides traction and drainage.

Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water, and poor surface cleaning.

 $This \, information \, is \, provided \, so \, that \, customers \, may \, make \, a \, realistic \, and \, informed \, decision \, information \, informed \, decision \, information \,$ when comparing Crossville's mosaic to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Shade & Texture Inde	ex								
V1 = Uniform Appearance	Differences among pieces from the same production run are minimal.								
V2 = Slight Variation	Clearly distinguishable differences in texture and/or pattern within similar colors.								
V3 = Moderate Variation	While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or textures to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.								
V4 = Substantial Variation	Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or textures from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.								

Inspect products upon delivery and for best results, blend tile from several cartons during installation.

V2

Crossville Appendix

DFFINITIONS

Bullnose* - Rounded convex trim used to provide a smooth, rounded edge for countertops, stair steps, and building corners. This is the most used trim shape for wall tile installations. Wall tile bullnose is sometimes referred to as surface cap. It has one rounded finished edge on the tile and can be used horizontally or vertically. Left Bullnose Corner & Right Bullnose Corner are also referred to as Double Bullnose

Calibrated Tile - Tiles that have been sorted to meet a pre-determined acceptance of variable range in size. Crossville" recommends a minimum grout joint of 3/16 inch.

Cross-Sheen® (UPS) - An invisible, integrated treatment that protects surfaces from the defacing effects of scuffs, stains, and even permanent marker and graffiti while imparting a subtle, color-enhancing glow.

Cross-Slate® (CS) - The Cross-Slate® finish combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone® for strong commercial value where enhanced traction is needed. Cross-Slate is recommended for high-traffic interior and exterior walking surfaces in both residential and commercial environments.

Cross-Tread® (CTS) - Enhanced traction and ease of maintenance make this texture a suitable choice for wet and greasy interior floor areas and exterior walking surfaces. The Cross-Tread® surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile.

Cove Base (Standard, round top)* - This cove base has a rounded finished top like bullnose and is used as a cove base in areas that will not have wall tile installed above it

Cove Base (Universal, flat top)* - This cove base has a finished, flat top. It can be used alone or with tile stacked on top. Exception: Color By Numbers* cove base has an unglazed, flat top.

Dynamic Coefficient of Friction (DCOF) - Sometimes called kinetic coefficient of friction. This is the ratio of the force necessary to keep a surface already in motion sliding over another divided by the weight (or normal force) of an object. This force is a materials property of the two surfaces. DCOF is usually less than SCOF for the same materials. Contaminants such as dirt, water, soap, oil, or grease can change this value.

Exterior (EXT) - A textured finish designed for exterior walking surfaces in residential and commercial environments where enhanced traction is desired. Exterior products are also suitable for interior paving, especially in wet areas.

Honed (HON)/Semi-Polished (SPO) - A uniform, semi-polished finish that results from mechanically altering the surface.

Modular - Tiles of various dimensions are sized so that they may be installed together in patterns with a common specified joint width. The difference between Actual and Nominal is the grout joint.

Patterned (PTN) - A repeated, decorative texture or finish created for visual interplay and/or interest.

Polished (PO) - Polished Porcelain Stone® is a practical alternative to natural stone with its attractive, mirror-like finish and can be used with other surface textures to increase visual interplay and interest. Polished finish adds a look of elegance and sophistication to interior floors and interior and exterior walls. Polished finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.

Rectified/Cross-Gr d® – A tile that has had all edges mechanically finished to achieve a more precise facial dimension. 3-4mm grout joint recommended.

Satin (SAT) - A smooth, semi-matte finish that results from mechanically altering the surface.


Textured (TX) – The rustic appearance and texture of natural slate designed for improved traction on exterior walking surfaces.

Through-body Color – The color of the tile is the same through and through.

Unpolished (UPS) - Cross-Sheen® finish imparts a subtle glow to an unpolished surface that enhances color and allows scuffs, stains, and even permanent marker and graffiti to be easily removed. Unpolished with Cross-Sheen® finish is appropriate for high-traffic interior floors and walls where low maintenance is desired. Unpolished with Cross-Sheen® finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.

Unpolished (UP) - A subtle, unaltered finish that may incorporate subtle variations in texture or gloss.


*Bullnose and Cove Base Diagrams























CrossvilleInc.com

If you want a better idea of what Crossville tile would look like in a particular room setting, visit our website at CrossvilleInc.com and try Cross-Vision. This powerful software tool allows you to visualize different types of Crossville tile in kitchens, bathrooms, dining rooms, and other living areas. In addition, our website features comprehensive information about Crossville's entire portfolio of products, including tile, trim, borders, and accents.

You can also download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at **CrossvilleInc.com**.

* Information here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.



PO Box 1168, Crossville, TN 38557 Phone 931.484.2110 Fax 931.456.2956

 ${\bf Crossc@CrossvilleInc.com}$

CrossvilleInc.com

Trade Organizations







Wet Dynamic Coefficient of Friction information gathered as a result of DCOF Acu Tes

(R) - Color Blox, Color Blox Mosaics, Color by Numbers, Cross-Colors, Cross-Tech, Cross-Sheen, Cross-Slate, Cross-Tread, Cross-Vision, Crossville, Crossville Ceramics, EcoCycle, EcoCycle Americana, EcoCycle Tile Process, Get-Planked, Glass Blox, Gotham, Nest, Notorious, Porcelain Stone, Shades by Crossville, Tile Take Back, and Crosstyle are copyrighted marks of Crossville, Inc.

 $TM-Alaska, Cursive, Familiar\ Territory, Hydrotect, Jazz\ Age, Laminam\ by\ Crossville, Reformation, Story\ Teller, and\ Swatches\ are\ registered\ trademarks\ of\ Crossville, Inc.\ The Control of th$

All products manufactured by Crossville® contain pre-consumer recycled content. Globally sourced products contain varied amounts of recycled content.